

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : F21V 7/00, G02B 5/30, B32B 7/02, 27/36	A1	(11) International Publication Number: WO 97/01726 (43) International Publication Date: 16 January 1997 (16.01.97)
---	----	--

(21) International Application Number: PCT/US96/07596
(22) International Filing Date: 24 May 1996 (24.05.96)
(30) Priority Data:
08/494,981 26 June 1995 (26.06.95) US

(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: WORTMAN, David, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). COBB, Sanford, Jr.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). CULL, Brian, D.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). WEBER, Michael, F.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). OUDERKIRK, Andrew, J.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).


(74) Agents: BARTINGALE, Kari, H. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: BACKLIGHT SYSTEM WITH MULTILAYER OPTICAL FILM REFLECTOR

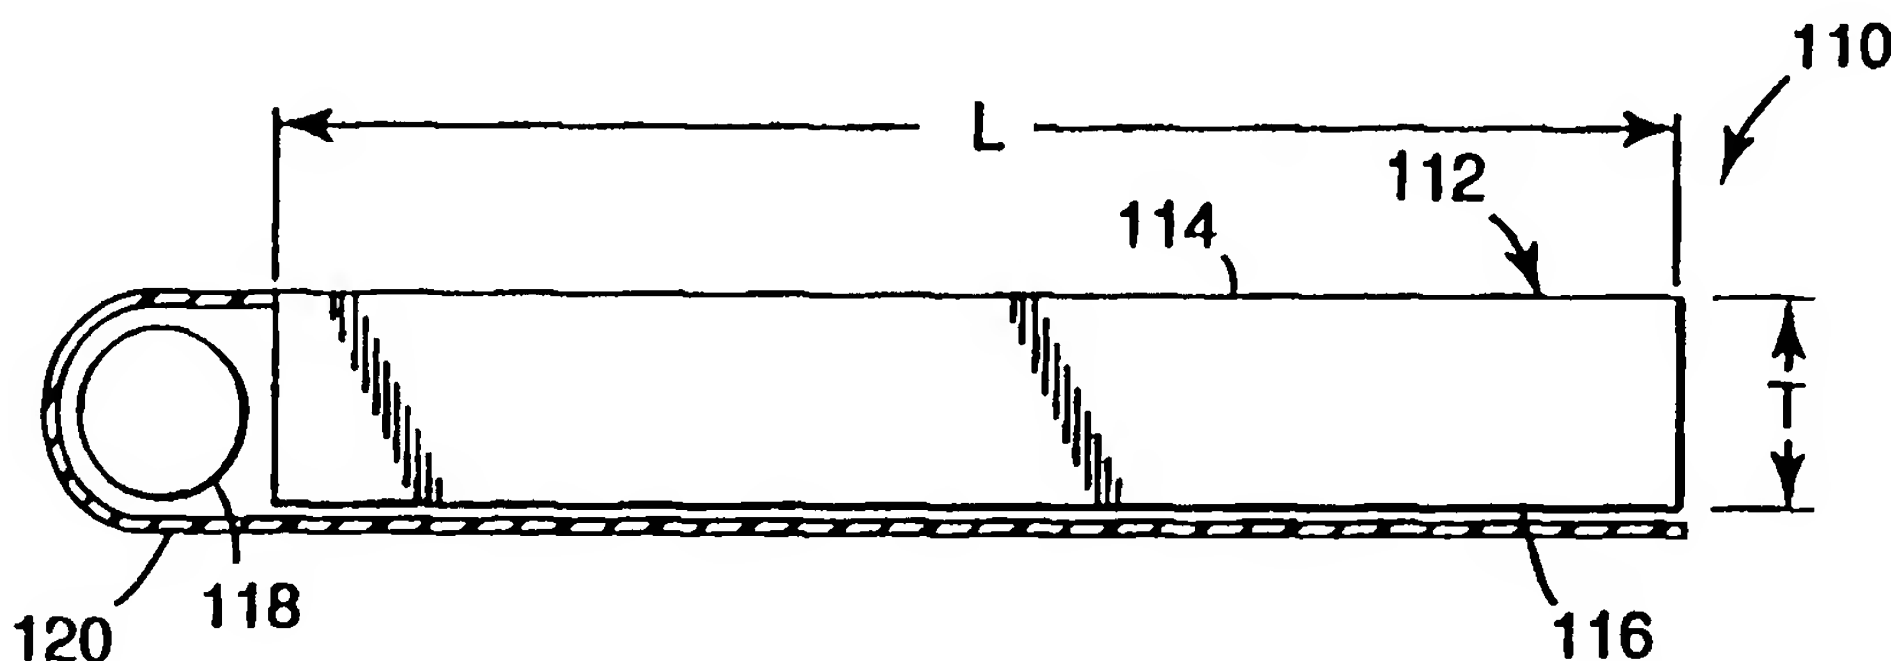

(57) Abstract

The present invention includes a backlight system incorporating a back reflector and/or a lamp cavity reflector constructed of a multilayer optical film.

FOR THE PURPOSES OF INFORMATION ONLY					
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.					
AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CH	Switzerland			SG	Singapore
CJ	Armenia			SI	Slovenia
CM	Cameroon			SK	Slovakia
CN	China	DK	Sri Lanka	SN	Senegal
CS	Czechoslovakia	LR	Liberia	SZ	Swaziland
CZ	Czech Republic	LT	Lithuania	TD	Chad
DE	Germany	LU	Luxembourg	TG	Togo
DK	Denmark	LV	Latvia	TJ	Tajikistan
EE	Estonia	MC	Monaco	TT	Trinidad and Tobago
ES	Spain	MD	Republic of Moldova	UA	Ukraine
FI	Finland	MG	Madagascar	UG	Uganda
FR	France	ML	Mali	US	United States of America
GA	Gabon	MN	Mongolia	UZ	Uzbekistan
		MR	Mauritania	VN	Viet Nam

FOR THE PURPOSES OF INFORMATION ONLY					
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.					
AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo			SG	Singapore
CH	Switzerland			SI	Slovenia
CJ	Czechia			SK	Slovakia
CM	Cameroon	DK	Dominican Republic	SN	Senegal
CN	China	DR	Dominican Republic	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

FOR THE PURPOSES OF INFORMATION ONLY					
Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.					
AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic			SE	Sweden
CG	Congo			SG	Singapore
CH	Switzerland			SI	Slovenia
CJ	Czechia			SK	Slovakia
CM	Cameroon	DK	Dominican Republic	SN	Senegal
CN	China	DR	Dominican Republic	SZ	Swaziland
CS	Czechoslovakia	LT	Lithuania	TD	Chad
CZ	Czech Republic	LU	Luxembourg	TG	Togo
DE	Germany	LV	Latvia	TJ	Tajikistan
DK	Denmark	MC	Monaco	TT	Trinidad and Tobago
EE	Estonia	MD	Republic of Moldova	UA	Ukraine
ES	Spain	MG	Madagascar	UG	Uganda
FI	Finland	ML	Mali	US	United States of America
FR	France	MN	Mongolia	UZ	Uzbekistan
GA	Gabon	MR	Mauritania	VN	Viet Nam

BACKLIGHT SYSTEM WITH MULTILAYER OPTICAL FILM REFLECTOR

Technical Field

5 The present invention relates to the field of backlight systems. More particularly, the present invention relates to improved backlight systems with multilayer optical film reflectors.

Background of the Invention

10 Liquid crystal (LC) displays are widely used for laptop computers, handheld calculators, digital watches, and similar devices in which information must be displayed to a viewer. In many applications, the displays incorporate a backlight to provide the light necessary to view the display when ambient light entering the display and reflected back out of the display is insufficient.

15 Backlight systems typically incorporate a light source and a light guide to direct light from the source and uniformly spread it over the display. Traditionally, light guides have been provided of light transparent material which propagate light along their length through total internal reflection. The light is typically reflected off of the back surface of the light guide and towards the front surface at angles
20 which allow it to exit the front surface of the light guide. Various reflection mechanisms are used to distribute the light exiting the guide uniformly including reflective dots, channels, facets etc.

 Backlight systems which use non-collimated light sources such as fluorescent lamps, etc. also typically incorporate at least two reflectors. A lamp
25 cavity mirror is typically used to reflect light exiting the light source in a direction away from the light guide back towards the guide. This reflector can be specular or

 second reflector is provided proximate the back surface of the light guide to reflect light escaping from the back surface of the light guide and redirect it

towards the front surface of the light guide where it can be transmitted to the viewer. These reflectors are typically constructed of a reflective white coating that also diffuse the reflected light over a Lambertian distribution.

5 A primary disadvantage with the conventional reflectors used in the lamp cavity and at the back surface of the light guide is, however, their relatively high absorptivities and high transmission of incident light. Typical reflectors will absorb or transmit about 4 to about 15% of the light incident upon them. The absorbed light is, of course, not available to the viewer, thereby degrading performance of the backlight.

10 The absorptive losses are, of course, increased with every reflection of light from the surface of conventional reflectors. With even the best conventional reflectors which absorb 4% of incident light, the intensity level of reflected light is about 81.5% after only five reflections.

15 These absorptive losses are also substantially increased when the backlight is used in combination with various light recycling films such as a structured partially reflective film. One micro-replicated structured partially reflective film is available as OPTICAL LIGHTING FILM from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

20 Structured partially reflective films typically have excellent reflectivity over certain ranges of angles but high transmission over others. Micro-replicated structured partially reflective films are available as Brightness Enhancement Film, available from Minnesota Mining and Manufacturing Company. In general, structured partially reflective films redirect and transmit light into a relatively narrow range of angles while reflecting the remainder of the light. As a result, 25 structured films transmit light and enhance brightness in backlight systems by recycling light which would otherwise exit a backlight outside a normal viewing angle.

Although recycling light in that manner is generally desired, it is a disadvantage when combined with conventional reflectors because some of the light which is reflected back into the light guide is absorbed or transmitted by the

conventional back reflectors. Those increased absorption losses reduce the luminance or brightness attainable by this combination of the backlight system.

Summary of the Invention

5 The present invention includes a backlight system incorporating a back reflector and/or a lamp cavity reflector constructed of a multilayer optical film.

 Providing the multilayer optical film for lamp cavity mirrors and/or back reflectors in backlight systems according to the present invention provides a number of advantages. One advantage is the low absorptivity of the film. The multilayer
10 optical film according to the present invention can reflect over 99% of the light striking the surface of the film.

 Another advantage is that the multilayer optical film is also highly efficient at reflecting light whether it is incident normal to the film surface or off-axis.

 Yet another advantage of backlight systems employing multilayer optical
15 film reflectors is that the multilayer optical film is relatively low in weight as compared to many conventional reflectors.

 Still another advantage of backlight systems employing multilayer optical film back reflectors is that because the film is relatively thin as compared to many conventional reflectors, the backlight systems can be thinner than a backlight system
20 employing a convention back reflector.

 Still a further advantage is that an entire light guide can be constructed using multilayer optical film according to the present invention for both the front and back surfaces of the light guide, thereby eliminating the need for a separate light guide and further reducing the cost, weight and bulk of backlight systems.

25 Backlight systems according to the present invention can also incorporate recycling technologies, such as structured films and/or reflective polarizers, without incurring the significant absorptive losses associated with conventional reflectors.

 Another advantage is that the multilayer optical film is nonconductive and

100 continued on page 2

These and other features and advantages of backlight assemblies according to the present invention will become apparent on reading the detailed description below together with reference to the drawings.

5

Brief Description of the Drawings

FIGURES 1a and 1b are diagrammatical views of the multilayer optical film of the present invention.

FIGURE 2 shows a two layer stack of films forming a single interface.

10 FIGURES 3-6, 7A and 7B depict the optical performance of multilayer mirrors given in Examples 1-5.

FIGURE 8 is a graphical representation illustrating the relationship between the number of reflections experienced by a ray of light (x-axis) as compared to the relative intensity of the light ray (y-axis) for reflective surfaces made of multilayer optical film and a standard reflector.

15

FIGURE 9 is a schematic cross-sectional view of one backlight system according to the present invention.

FIGURE 10 is a schematic cross-sectional view of an alternate backlight system according to the present invention.

20 FIGURE 11 is a schematic cross-sectional view of another alternate backlight system according to the present invention.

FIGURE 12 is a schematic cross-sectional view of another alternate backlight system according to the present invention.

FIGURE 13 shows a schematic cross-sectional view of another alternate backlight system according to the present invention.

25

FIGURE 14 shows a schematic cross-sectional view of another alternate backlight system according to the present invention.

Detailed Description of the Invention

Multilayer Optical Film

30

The backlight systems described herein rely on the unique and advantageous properties of multilayer optical films. The advantages, characteristics and

manufacturing of such films are most completely described in the above mentioned copending and commonly assigned U.S. Patent Application 08/402,041, filed March 10, 1995, titled OPTICAL FILM. The multilayer optical film is useful, for example, as highly efficient mirrors and/or polarizers. A relatively brief description
5 of the properties and characteristics of the multilayer optical film is presented below followed by a description of illustrative embodiments of backlight systems using the multilayer optical film according to the present invention.

Multilayer optical films as used in conjunction with the present invention exhibit relatively low absorption of incident light, as well as high reflectivity for
10 off-axis as well as normal light rays. These properties generally hold whether the films are used for pure reflection or reflective polarization of light. The unique properties and advantages of the multi-layer optical film provides an opportunity to design highly efficient backlight systems which exhibit low absorption losses when compared to known backlight systems.

15 An exemplary multilayer optical film of the present invention as illustrated in Figures 1A and 1B includes a multilayer stack 10 having alternating layers of at least two materials 12 and 14. At least one of the materials has the property of stress induced birefringence, such that the index of refraction (n) of the material is affected by the stretching process. Figure 1A shows an exemplary multilayer stack
20 before the stretching process in which both materials have the same index of refraction. Light ray 13 experiences no index of refraction change and passes through the stack. In Figure 1B, the same stack has been stretched, thus increasing the index of refraction of material 12. The difference in refractive index at each boundary between layers will cause part of ray 15 to be reflected. By stretching the
25 multilayer stack over a range of uniaxial to biaxial orientation, a film is created with a range of reflectivities for differently oriented plane-polarized incident light. The multilayer stack can thus be made useful as reflective polarizers or mirrors.

Multilayer optical films constructed according to the present invention exhibit Brewster angles (the angle of incidence at which the reflectivity of light incident at any of the layer interfaces) which is very large or is nonexistent. In
30 contrast, known multilayer polymer films exhibit relatively small Brewster angles at

layer interfaces, resulting in transmission of light and/or undesirable iridescence. The multilayer optical films according to the present invention, however, allow for the construction of mirrors and polarizers whose reflectivity for p polarized light decrease slowly with angle of incidence, are independent of angle of incidence, or
5 increase with angle of incidence away from the normal. As a result, multilayer stacks having high reflectivity for both s and p polarized light over a wide bandwidth, and over a wide range of angles can be achieved.

Figure 2 shows two layers of a multilayer stack, and indicates the three dimensional indices of refraction for each layer. The indices of refraction for each
10 layer are n_{1x} , n_{1y} , and n_{1z} for layer 102, and n_{2x} , n_{2y} , and n_{2z} for layer 104. The relationships between the indices of refraction in each film layer to each other and to those of the other layers in the film stack determine the reflectance behavior of the multilayer stack at any angle of incidence, from any azimuthal direction. The principles and design considerations described in U.S. patent application Serial
15 Number 08/402,041 can be applied to create multilayer stacks having the desired optical effects for a wide variety of circumstances and applications. The indices of refraction of the layers in the multilayer stack can be manipulated and tailored to produce the desired optical properties.

Referring again to Figure 1B, the multilayer stack 10 can include tens,
20 hundreds or thousands of layers, and each layer can be made from any of a number of different materials. The characteristics which determine the choice of materials for a particular stack depend upon the desired optical performance of the stack. The stack can contain as many materials as there are layers in the stack. For ease of manufacture, preferred optical thin film stacks contain only a few different
25 materials.

The boundaries between the materials, or chemically identical materials with different physical properties, can be abrupt or gradual. Except for some simple cases with analytical solutions, analysis of the latter type of stratified media with
30 uniform layers having abrupt boundaries but with only a small change in properties between adjacent layers.

The preferred multilayer stack is comprised of low/high index pairs of film layers, wherein each low/high index pair of layers has a combined optical thickness of $1/2$ the center wavelength of the band it is designed to reflect. Stacks of such films are commonly referred to as quarterwave stacks. For multilayer optical films
5 concerned with the visible and the near infrared wavelengths, a quarterwave stack design results in each of the layers in the multilayer stack having an average thickness of not more than 0.5 microns.

In those applications where reflective films (e.g. mirrors) are desired, the desired average transmission for light of each polarization and plane of incidence
10 generally depends upon the intended use of the reflective film. One way to produce a multilayer mirror film is to biaxially stretch a multilayer stack which contains a birefringent material as the high index layer of the low/high index pair. For a high efficiency reflective film, average transmission along each stretch direction at normal incidence over the visible spectrum (400-700nm) is desirably less than 10%
15 (reflectance greater than 90%), preferably less than 5% (reflectance greater than 95%), more preferably less than 2% (reflectance greater than 98%), and even more preferably less than 1% (reflectance greater than 99%). The average transmission at 60 degrees from the normal from 400-700 nm is desirably less than 20% (reflectance greater than 80%), preferably less than 10% (reflectance greater than
20 90%), more preferably less than 5% (reflectance greater than 95%), and even more preferably less than 2% (reflectance greater than 98%), and even more preferably less than 1% (reflectance greater than 99%).

In addition, asymmetric reflective films may be desirable for certain applications. In that case, average transmission along one stretch direction may be
25 desirably less than, for example, 50%, while the average transmission along the other stretch direction may be desirably less than, for example 20%, over a bandwidth of, for example, the visible spectrum (400-700 nm), or over the visible spectrum and into the near infrared (e.g. 400-850 nm).

Multilayer optical films can also be designed as polarizers. One way to produce a multilayer reflective polarizer is to uniaxially
30 stretch a multilayer stack which contains a birefringent material as the high index

layer of the low/high index pair. The resulting reflective polarizers have high reflectivity for light with its plane of polarization parallel to one axis (in the stretch direction) for a broad range of angles of incidence, and simultaneously have low reflectivity and high transmissivity for light with its plane of polarization parallel to the other axis (in the non-stretch direction) for a broad range of angles of incidence. By controlling the three indices of refraction of each film, n_x , n_y and n_z , the desired polarizer behavior can be obtained.

For many applications, the ideal reflecting polarizer has high reflectance along one axis (the so-called extinction axis) and zero reflectance along the other (the so-called transmission axis), at all angles of incidence. For the transmission axis of a polarizer, it is generally desirable to maximize transmission of light polarized in the direction of the transmission axis over the bandwidth of interest and also over the range of angles of interest.

The average transmission at normal incidence for a polarizer in the transmission axis across the visible spectrum (400-700 nm for a bandwidth of 300 nm) is desirably at least 50%, preferably at least 70%, more preferably at least 85%, and even more preferably at least 90%. The average transmission at 60 degrees from the normal (measured along the transmission axis for p-polarized light) for a polarizer from 400-700 nm is desirably at least 50%, preferably at least 70%, more preferably at least 80%, and even more preferably at least 90%.

The average transmission for a multilayer reflective polarizer at normal incidence for light polarized in the direction of the extinction axis across the visible spectrum (400-700 nm for a bandwidth of 300 nm) is desirably at less than 50%, preferably less than 30%, more preferably less than 15%, and even more preferably less than 5%. The average transmission at 60 degrees from the normal (measured along the transmission axis for p-polarized light) for a polarizer for light polarized in the direction of the extinction axis from 400-700 nm is desirably less than 50%, preferably less than 30%, more preferably less than 15%, and even more preferably less than 5%.

For certain applications, high reflectivity for p polarized light with its plane of polarization parallel to the transmission axis at off-normal angles are preferred.

The average reflectivity for light polarized along the transmission axis should be more than 20% at an angle of at least 20 degrees from the normal.

In addition, although reflective polarizing films and asymmetric reflective films are discussed separately herein, it should be understood that two or more of such films could be provided to reflect substantially all light incident on them (provided they are properly oriented with respect to each other to do so). This construction is typically desired when the multilayer optical film is used as a reflector in a backlight system according to the present invention.

If some reflectivity occurs along the transmission axis, the efficiency of the polarizer at off-normal angles may be reduced. If the reflectivity along the transmission axis is different for various wavelengths, color may be introduced into the transmitted light. One way to measure the color is to determine the root mean square (RMS) value of the transmissivity at a selected angle or angles over the wavelength range of interest. The % RMS color, can be determined according to the equation:

$$C_{RMS} = \frac{\int_{\lambda_1}^{\lambda_2} ((T - \bar{T})^2)^{1/2} d\lambda}{\bar{T}}$$

where the range λ_1 to λ_2 is the wavelength range, or bandwidth, of interest, T is the transmissivity along the transmission axis, and \bar{T} is the average transmissivity along the transmission axis in the wavelength range of interest. For applications where a low color polarizer is desirable, the % RMS color should be less than 10%, preferably less than 8%, more preferably less than 3.5%, and even more preferably less than 2% at an angle of at least 30 degrees from the normal, preferably at least 45 degrees from the normal, and even more preferably at least 60 degrees from the normal.

Alternatively, reflectivity can be measured along the extinction axis, or the transmission axis for the particular application with the desired amount of reflectivity along the extinction axis across the bandwidth of interest. For polarizers

having a bandwidth in the visible range (400-700 nm, or a bandwidth of 300 nm), average transmission along the extinction axis at normal incidence is desirably less than 40%, more desirably less than 25%, preferably less than 15%, more preferably less than 5% and even more preferably less than 3%.

5

Materials Selection and Processing

With the design considerations described in the above mentioned U.S. Patent Application Serial Number 08/402,041, one of ordinary skill will readily appreciate that a wide variety of materials can be used to form multilayer reflective films or polarizers according to the invention when processed under conditions selected to yield the desired refractive index relationships. The desired refractive index relationships can be achieved in a variety of ways, including stretching during or after film formation (e.g., in the case of organic polymers), extruding (e.g., in the case of liquid crystalline materials), or coating. In addition, it is preferred that the two materials have similar rheological properties (e.g., melt viscosities) such that they can be co-extruded.

In general, appropriate combinations may be achieved by selecting, as the first material, a crystalline or semi-crystalline material, preferably a polymer. The second material, in turn, may be crystalline, semi-crystalline, or amorphous. The second material may have a birefringence opposite of the first material. Or, the second material may have no birefringence, or less birefringence than the first material.

Specific examples of suitable materials include polyethylene naphthalate (PEN) and isomers thereof (e.g., 2,6-, 1,4-, 1,5-, 2,7-, and 2,3-PEN), polyalkylene terephthalates (e.g., polyethylene terephthalate, polybutylene terephthalate, and poly-1,4-cyclohexanedimethylene terephthalate), polyimides (e.g., polyacrylic imides), polyetherimides, atactic polystyrene, polycarbonates, polymethacrylates (e.g., polyisobutyl methacrylate, polypropylmethacrylate, polyethylmethacrylate, polymethylmethacrylate, polybutylmethacrylate, polyhexylmethacrylate, and polyoctylmethacrylate), polyacrylates (e.g., polyethylacrylate, polymethylacrylate, polybutylacrylate, and polyoctylacrylate), syndiotactic polymethylacrylate), syndiotactic polystyrene (sPS), syndiotactic poly-alpha-methyl styrene, syndiotactic polydichlorostyrene, copolymers and blends of any of these

polystyrenes, cellulose derivatives (e.g., ethyl cellulose, cellulose acetate, cellulose propionate, cellulose acetate butyrate, and cellulose nitrate), polyalkylene polymers (e.g., polyethylene, polypropylene, polybutylene, polyisobutylene, and poly(4-methyl)pentene), fluorinated polymers (e.g., perfluoroalkoxy resins, polytetrafluoroethylene, fluorinated ethylene-propylene copolymers, polyvinylidene fluoride, and polychlorotrifluoroethylene), chlorinated polymers (e.g., polyvinylidene chloride and polyvinylchloride), polysulfones, polyethersulfones, polyacrylonitrile, polyamides, silicone resins, epoxy resins, polyvinylacetate, polyether-amides, ionomeric resins, elastomers (e.g., polybutadiene, polyisoprene, and neoprene), and polyurethanes. Also suitable are copolymers, e.g., copolymers of PEN (e.g., copolymers of 2,6-, 1,4-, 1,5-, 2,7-, and/or 2,3-naphthalene dicarboxylic acid, or esters thereof, with (a) terephthalic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane glycols; (e) cycloalkane glycols (e.g., cyclohexane dimethane diol); (f) alkane dicarboxylic acids; and/or (g) cycloalkane dicarboxylic acids (e.g., cyclohexane dicarboxylic acid)), copolymers of polyalkylene terephthalates (e.g., copolymers of terephthalic acid, or esters thereof, with (a) naphthalene dicarboxylic acid, or esters thereof; (b) isophthalic acid, or esters thereof; (c) phthalic acid, or esters thereof; (d) alkane glycols; (e) cycloalkane glycols (e.g., cyclohexane dimethane diol); (f) alkane dicarboxylic acids; and/or (g) cycloalkane dicarboxylic acids (e.g., cyclohexane dicarboxylic acid)), and styrene copolymers (e.g., styrene-butadiene copolymers and styrene-acrylonitrile copolymers), 4,4'-bibenzoic acid and ethylene glycol. In addition, each individual layer may include blends of two or more of the above-described polymers or copolymers (e.g., blends of sPS and atactic polystyrene). The coPEN described may also be a blend of pellets where at least one component is a polymer based on naphthalene dicarboxylic acid and other components are other polyesters or polycarbonates, such as a PET, a PEN or a coPEN.

EXAMPLES OF CO-PEN, PEN/CO-PEN, PEN/SPS, PET/CO-PEN, PET/SPS, PEN/Eastar, and PET/Eastar, where "co-PEN" refers to a copolymer or blend

based upon naphthalene dicarboxylic acid (as described above) and Eastar is polycyclohexanedimethylene terephthalate commercially available from Eastman Chemical Co.

Particularly preferred combinations of layers in the case of reflective films include PET/Ecdel, PEN/Ecdel, PEN/sPS, PEN/THV, PEN/co-PET, and PET/sPS, where "co-PET" refers to a copolymer or blend based upon terephthalic acid (as described above), Ecdel is a thermoplastic polyester commercially available from Eastman Chemical Co., and THV is a fluoropolymer commercially available from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

The number of layers in the film is selected to achieve the desired optical properties using the minimum number of layers for reasons of film thickness, flexibility and economy. In the case of both polarizers and reflective films, the number of layers is preferably less than 10,000, more preferably less than 5,000, and even more preferably less than 2,000.

As discussed above, the ability to achieve the desired relationships among the various indices of refraction (and thus the optical properties of the multilayer film) is influenced by the processing conditions used to prepare the multilayer film. In the case of organic polymers which can be oriented by stretching, the films are generally prepared by co-extruding the individual polymers to form a multilayer film and then orienting the film by stretching at a selected temperature, optionally followed by heat-setting at a selected temperature. Alternatively, the extrusion and orientation steps may be performed simultaneously. In the case of polarizers, the film is stretched substantially in one direction (uniaxial orientation), while in the case of reflective films the film is stretched substantially in two directions (biaxial orientation).

The film may be allowed to dimensionally relax in the cross-stretch direction from the natural reduction in cross-stretch (equal to the square root of the stretch ratio). It may simply be constrained to limit any substantial change in cross stretch dimension. Alternatively, the film may be stretched in the cross stretch dimension. The film may be stretched in the machine direction, as with a length orienter, or in width using a tenter.

The pre-stretch temperature, stretch temperature, stretch rate, stretch ratio, heat set temperature, heat set time, heat set relaxation, and cross-stretch relaxation are selected to yield a multilayer film having the desired refractive index relationship. These variables are inter-dependent; thus, for example, a relatively low stretch rate could be used if coupled with, e.g., a relatively low stretch temperature. It will be apparent to one of ordinary skill how to select the appropriate combination of these variables to achieve the desired multilayer film. In general, however, a stretch ratios in the range from 1:2 to 1:10 (more preferably 1:3 to 1:7) in the stretch direction and from 1:0.2 to 1:10 (more preferably from 1:0.3 to 1:7) orthogonal to the stretch direction is preferred.

Suitable multilayer films may also be prepared using techniques such as spin coating (e.g., as described in Boese et al., J. Polym. Sci.: Part B, 30:1321 (1992) for birefringent polyimides, and vacuum deposition (e.g., as described by Zang et al., Appl. Phys. Letters, 59:823 (1991) for crystalline organic compounds; the latter technique is particularly useful for certain combinations of crystalline organic compounds and inorganic materials.

Exemplary multilayer reflective mirror films and multilayer reflective polarizers will now be described in the following examples.

20 EXAMPLE 1 (PEN:THV 500, 449, Mirror)

A coextruded film containing 449 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. A Polyethylene naphthalate (PEN) with an Intrinsic Viscosity of 0.53 dl/g (60 wt. % phenol/40 wt. % dichlorobenzene) was delivered by one extruder at a rate of 56 pounds per hour and THV 500 (a fluoropolymer available from Minnesota Mining and Manufacturing Company) was delivered by another extruder at a rate of 11 pounds per hour. The PEN was on the skin layers and 50% of the PEN was present in the two skin layers. The feedblock method was used to generate a multilayer film. The extrudate of 449 layers. The cast web was 20 mils thick and 12 inches wide. The web was later biaxially oriented using a laboratory stretching device that uses a

pantograph to grip a square section of film and simultaneously stretch it in both directions at a uniform rate. A 7.46 cm square of web was loaded into the stretcher at about 100°C and heated to 140°C in 60 seconds. Stretching then commenced at 10%/sec (based on original dimensions) until the sample was stretched to about 3.5x3.5. Immediately after the stretching the sample was cooled by blowing room temperature air at it.

Figure 3 shows the transmission of this multilayer film. Curve (a) shows the response at normal incidence, while curve (b) shows the response at 60 degrees for p-polarized light.

EXAMPLE 2 (PEN:PMMA, 601, Mirror)

A coextruded film containing 601 layers was made on a sequential flat-film-making line via a coextrusion process. Polyethylene Naphthalate (PEN) with an Intrinsic Viscosity of 0.57 dl/g (60 wt. % phenol/40 wt. % dichlorobenzene) was delivered by extruder A at a rate of 114 pounds per hour with 64 pounds per hour going to the feedblock and the rest going to skin layers described below. PMMA (CP-82 from ICI of Americas) was delivered by extruder B at a rate of 61 pounds per hour with all of it going to the feedblock. PEN was on the skin layers of the feedblock. The feedblock method was used to generate 151 layers using the feedblock such as those described in U.S. Patent 3,801,429, after the feedblock two symmetric skin layers were coextruded using extruder C metering about 30 pounds per hour of the same type of PEN delivered by extruder A. This extrudate passed through two multipliers producing an extrudate of about 601 layers. U.S. Patent 3,565,985 describes similar coextrusion multipliers. The extrudate passed through another device that coextruded skin layers at a total rate of 50 pounds per hour of PEN from extruder A. The web was length oriented to a draw ratio of about 3.2 with the web temperature at about 280°F. The film was subsequently preheated to about 310°F in about 38 seconds and drawn in the transverse direction to a draw ratio of about 3.2 with the web temperature at about 310°F. The film was subsequently preheated to about 440°F with no relaxation allowed. The finished film thickness was about 3 mil.

As seen in Figure 4, curve (a), the bandwidth at normal incidence is about 350 nm with an average in-band extinction of greater than 99%. The amount of optical absorption is difficult to measure because of its low value, but is less than 1%. At an incidence angle of 50° from the normal both s (curve (b)) and p-polarized (curve (c)) light showed similar extinctions, and the bands were shifted to shorter wavelengths as expected. The red band-edge for s-polarized light is not shifted to the blue as much as for p-polarized light due to the expected larger bandwidth for s-polarized light, and due to the lower index seen by the p-polarized light in the PEN layers.

EXAMPLE 3 (PEN:PCTG, 449, Polarizer)

A coextruded film containing 481 layers was made by extruding the cast web in one operation and later orienting the film in a laboratory film-stretching apparatus. The feedblock method was used with a 61 layer feedblock and three (2x) multipliers. Thick skin layers were added between the final multiplier and the die. Polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (60 wt. % phenol/40 wt. % dichlorobenzene) was delivered to the feedblock by one extruder at a rate of 25.0 pounds per hour. Glycol modified polyethylene dimethyl cyclohexane terephthalate (PCTG 5445 from Eastman) was delivered by another extruder at a rate of 25.0 pounds per hour. Another stream of PEN from the above extruder was added as skin layers after the multipliers at a rate of 25.0 pounds per hour. The cast web was 0.007 inches thick and 12 inches wide. The web was layer uniaxially oriented using a laboratory stretching device that uses a pantograph to grip a section of film and stretch it in one direction at a uniform rate while it is allowed to freely relax in the other direction. The sample of web loaded was about 5.40 cm wide (the unconstrained direction) and 7.45 cm long between the grippers of the pantograph. The web was loaded into the stretcher at about 100°C and heated to 125°C for 15 seconds. Stretching was then commenced at 20%/second (based on original dimensions) until the sample is stretched to 200% (based on gripper to gripper measurements). Immediately after stretching, the sample was

cooled by blowing room temperature air at it. In the center, the sample was found to relax by a factor of 2.0.

Figure 5 shows the transmission of this multilayer film where curve a shows transmission of light polarized in the non-stretch direction at normal incidence, curve b shows transmission of p-polarized light polarized in the non-stretched direction at 60° incidence, and curve c shows the transmission of light polarized in the stretch direction at normal incidence. Average transmission for curve a from 400-700nm is 89.7%, average transmission for curve b from 400-700nm is 96.9%, and average transmission for curve c from 400-700nm is 4.0%. % RMS color for curve a is 1.05%, and %RMS color for curve b is 1.44%.

EXAMPLE 4 (PEN:CoPEN, 601, Polarizer)

A coextruded film containing 601 layers was made on a sequential flat-film-making line via a coextrusion process. A Polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.54 dl/g (60 wt % Phenol plus 40 wt % dichlorobenzene) was delivered by one extruder at a rate of 75 pounds per hour and the coPEN was delivered by another extruder at 65 pounds per hour. The coPEN was a copolymer of 70 mole % 2,6 naphthalene dicarboxylate methyl ester, 15 % dimethyl isophthalate and 15% dimethyl terephthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. The PEN skin layers were coextruded on the outside of the optical stack with a total thickness of 8% of the coextruded layers. The optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers were 1.2 and 1.27, respectively. The film was subsequently preheated to 310°F in about 40 seconds and drawn in the transverse direction to a draw ratio of about 5.0 at a rate of 6% per second. The finished film thickness was about 2 mils.

FIGURE 5 shows the transmission of light polarized in the non stretch direction at normal incidence, curve b shows transmission of p-polarized light at 60° incidence, and curve c shows

transmission of light polarized in the non stretch direction at normal incidence, curve b shows transmission of p-polarized light at 60° incidence, and curve c shows

transmission of light polarized in the stretch direction at normal incidence. Note the very high transmission of p-polarized light in the non-stretch direction at both normal and 60° incidence (80-100%). Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700nm) shown by curve c. Reflectance is nearly 99% between 500 and 650nm.

EXAMPLE 5 (PEN:sPS, 481, Polarizer)

A 481 layer multilayer film was made from a polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.56 dl/g measured in 60 wt. % phenol and 40 wt % dichlorobenzene purchased from Eastman Chemicals and a syndiotactic polystyrene (sPS) homopolymer (weight average molecular weight = 200,000 Daltons, sampled from Dow Corporation). The PEN was on the outer layers and was extruded at 26 pounds per hour and the sPS at 23 pounds per hour. The feedblock used produced 61 layers with each of the 61 being approximately the same thickness. After the feedblock three (2x) multipliers were used. Equal thickness skin layers containing the same PEN fed to the feedblock were added after the final multiplier at a total rate of 22 pounds per hour. The web was extruded through a 12" wide die to a thickness of about 0.011 inches (0.276 mm). The extrusion temperature was 290°C.

This web was stored at ambient conditions for nine days and then uniaxially oriented on a tenter. The film was preheated to about 320°F (160°C) in about 25 seconds and drawn in the transverse direction to a draw ratio of about 6:1 at a rate of about 28% per second. No relaxation was allowed in the stretched direction. The finished film thickness was about 0.0018 inches (0.046 mm).

Figure 7A shows the optical performance of this PEN:sPS reflective polarizer containing 481 layers. Curve a shows transmission of light polarized in the non-stretch direction at normal incidence, curve b shows transmission of p polarized light at 60° incidence, and curve c shows transmission of light polarized in the stretch direction at normal incidence. The average transmission of p polarized light at both normal and 60° incidence. Average transmission for curve a over 400-700 nm is 86.2%, the average transmission for curve b over 400-700 nm

is 79.7%. Also note the very high reflectance of light polarized in the stretched direction in the visible range (400-700nm) shown by curve c. The film has an average transmission of 1.6% for curve c between 400 and 700 nm. The % RMS color for curve a is 3.2%, while the % RMS color for curve b is 18.2%.

5

EXAMPLE 6 (PEN:coPEN, 603, Polarizer)

A reflecting polarizer comprising 603 layers was made on a sequential flat-film making line via a coextrusion process. A polyethylene naphthalate (PEN) with an intrinsic viscosity of 0.47 dl/g (in 60 wt% phenol plus 40 wt% dichlorobenzene) was delivered by an extruder at a rate of 83 pounds (38 kg) per hour and the CoPEN was delivered by another extruder at 75 pounds (34 kg) per hour. The CoPEN was a copolymer of 70 mole %, 2,6 naphthalene dicarboxylate methyl ester, 15 mole % dimethyl terephthalate, and 15 mole % dimethyl isophthalate with ethylene glycol. The feedblock method was used to generate 151 layers. The feedblock was designed to produce a stack of films having a thickness gradient from top to bottom, with a thickness ratio of 1.22 from the thinnest layers to the thickest layers. This optical stack was multiplied by two sequential multipliers. The nominal multiplication ratio of the multipliers was 1.2 and 1.4, respectively. Between the final multiplier and the die, skin layers were added composed of the same CoPEN described above, delivered by a third extruder at a total rate of 106 pounds (48 kg) per hour. The film was subsequently preheated to 300°F (150°C) in about 30 seconds and drawn in the transverse direction to a draw ratio of approximately 6 at an initial rate of about 20% per second. The finished film thickness was approximately 0.0035 inch (0.089 mm).

25

Figure 7B shows the optical performance of the polarizer of Example 6. Curve a shows transmission of light polarized in the non-stretch direction at normal incidence, curve b shows transmission of p-polarized light in the nonstretch direction at 50 degree angle of incidence, and curve c shows transmission of light transmission of light polarized in the non-stretch direction. Average transmission for curve a over 400-700 nm is 87%. Also note the very high reflectance of light

polarized in the stretched direction in the visible range (400-700nm) shown by curve c. The film has an average transmission of 2.5% for curve c between 400 and 700 nm. The % RMS color for curve b is 5%.

5 II. Backlight Systems Using Multilayer Optical Films

Backlight systems according to the present invention use multilayer optical films to reflect light. Reflectors constructed of multilayer optical film are most advantageously located around the light source as well as along the back surface of the light guide, although in some instances they may be used in one or the other
10 location alone.

The advantages of using multilayer optical film for reflectors in backlight systems are graphically illustrated in Figure 8. Curve a shows the total reflectivity as a function of the number of reflections for a conventional reflector that has 96% reflectivity (i.e., about 4% of the light is absorbed at each reflection). As shown by
15 curve a, the intensity of light which has been reflected from a conventional reflector decreases significantly after a relatively low number of reflections. In contrast, curve b shows the total reflectivity for a multilayer mirror film having a reflectivity of about 99.4%. Curve b clearly shows a much smaller decrease in reflectivity. The difference becomes especially pronounced after only 2-4 reflections.

20 For example, after five reflections, the intensity of light is about 97% for light reflected from multilayer optical films according to the present invention, while the intensity drops to about 81.5% for light reflected from a conventional reflector which is only about 3.5% less efficient. Although it is difficult to determine the average number of reflections experienced by light in a backlight system, the
25 number of reflections can be expected to increase as uniformity and/or aspect ratio (defined more completely below) increase in any given backlight system. Those increased reflections would cause a significant loss in efficiency for backlight systems using conventional reflectors which would not be experienced in backlight
30 invention

The practical value of this characteristic is that the efficiency of the backlighting systems and any display employing one is greatly enhanced resulting in increased brightness and/or contrast as compared to systems employing conventional reflectors. Put another way, the number of acceptable reflections for a given light ray in backlight systems employing multilayer optical film reflectors according to the present invention can be significantly increased without substantially impairing the overall output of the backlight system as compared to backlight systems employing conventional reflectors. Put another way, the probability that a photon will not be lost is increased in backlight systems employing optical film reflectors.

Figures 9-12 will now be described. The figures schematically depict various backlight systems manufactured according to the present invention, but are not intended to limit the scope of the present invention. For example, all of the figures depict light guides having essentially rectangular cross-sections. It will be understood, however, that the multilayer optical film reflectors can be used with any light guide including a lamp cavity reflector and/or a back reflector. Other examples of light guides include wedge-shaped guides, channeled guides, pseudo-wedge guides, etc.

Figure 9 depicts, in a cross-sectional schematic view, an illustrative backlight system 110 which includes a light guide 112 and a light source 118. Light source 118 may be any source which emits light, such as a fluorescent lamp, incandescent lamp, solid state source, electroluminescent (EL) light source or any other source of visible light. Although the embodiments described below typically include one such source, it will be understood that a backlight system according to the present invention could include two or more individual sources located at the same or different positions and combining to provide the required amount of light.

In the preferred embodiments, the light source 118 comprises a source emitting light having randomized polarization. A reflective polarizer may be placed between the source and light guide such that light transmitted to the light guide is substantially of one polarization orientation. The reflective polarization can be accomplished using bulk optics or a multilayer reflective polarizer, both of which

are described in copending and commonly-assigned U.S. patent application Serial No. 08/418,009, titled POLARIZED LIGHT SOURCES, filed on April 6, 1995.

The light guide 112 includes a front surface 114 and a back surface 116. Components such as polarizers, diffusers, liquid crystal display panels, graphics
5 films, prints and compensation/retarder films are typically placed above the front surface 114 of the light guide 112, are not depicted in Figure 9 (or any of the backlight systems depicted in any of the figures) but will be well known to those skilled in the art and will not be described herein.

A lamp cavity reflector 120 is depicted as partially surrounding the light
10 source 118 and coupling the same to the light guide 112. Conventional lamp cavity reflectors are constructed of a silvered film which exhibit reflectivities of about 96% for visible wavelengths, with the remaining light being substantially absorbed by the reflector. A lamp reflector 120 constructed using multilayer optical film according to the present invention, however, exhibits much higher reflectivities, typically
15 about 98% or greater which significantly reduces losses. In addition, the presently described multilayer film has very high reflectivity, preferably at least 90%, more preferably 95%, and even more preferably at least 98%, at angles away from the normal (for example, greater than 45°). Since in many backlighting systems, such as those shown in Figures 9-12, the light enters from the side of the light guide, this
20 is a distinct advantage.

It may be desirable to provide for increased lamp operating temperatures in which case the exterior surface of the reflector 120 can be coated with a metallic layer or an additional reflector can be provided (see reference number 224 in Figure 10 and the description below). This can increase infrared reflectance as well
25 as reduce convective cooling of the lamp 118.

Backlight systems incorporating multilayer optical film as the lamp cavity reflector 120 will typically exhibit approximately a 20% or greater increase in brightness when a silvered optical film lamp reflector 120 is replaced by multilayer
30 film. The increase in brightness is a result of the extremely low absorptivity of the multilayer optical film. This increase can be largely attributed to the extremely low absorptivity and high reflectivity of the multilayer optical film.

In the backlight system 110, the lamp cavity reflector 120 is preferably integrated with the back reflector 122, either by laminating or similarly attaching the two pieces together or by using one continuous sheet for both functions. As a result, there are essentially no losses associated with the interface between the two
 5 reflectors 120 and 122. In addition, manufacturing of the backlight system 110 can be simplified by such a design. In addition, it maybe preferred in certain applications to laminate or otherwise similarly attach the back reflector to the back of the light guide 112. This eliminates the air gap between components, thus reducing surface reflections and increasing overall efficiency of the system.

10 The mechanism used to extract light from the light guide 112 is not depicted in Figure 9 as any suitable mechanism could be used. Examples of extraction mechanisms include, but are not limited to: diffusing dots on the back surface 116 of light guide 112, channels in the back surface 116, the discontinuities associated with a pseudo-wedge light guide 112, and the increased reflected angles within a
 15 wedge-shaped light guide 112, and posts that adhere the reflector to the guide and provide light diffusion within the guide.

In the instance where a less efficient multilayer reflective film is used as the back reflector 122, it may be advantageous to provide the back surface layer 122, i.e., the surface facing away from the light guide 112, with a thin metal or other
 20 reflective coating to decrease transmissive losses through the multilayer optical film reflector 122, thereby improving the reflectivity of the multilayer optical film 122. It will of course, be understood that the metallic or other reflective coating may suffer from some absorption losses, but the fraction of light transmitted through the film 122 will typically be less than 5% (more preferably less than about 1%) of the
 25 total light incident on the film 122.

Another advantage of backlight systems 110 incorporating multilayer optical film for the back reflector 122 is in the flexibility for designing backlight systems which have relatively high aspect ratios. Aspect ratio can be defined as the inverse

$$\text{Aspect Ratio} = \frac{\text{Area of the Surface}}{\text{Thickness of the Surface}}$$
 the case of a planar surface over which light is to be distributed)

In Figure 9, thickness of the light guide 112 is depicted as T while the length of the light guide is depicted as L. That ratio, L/T can be significantly higher in backlight systems 110 according to the present invention due to the relative thinness and flexibility of the multilayer optical films. The aspect ratio can be higher because
5 the number of reflections for any given light ray entering light guide 112 before it exits the backlight system 110 can be significantly higher without substantially degrading the overall light output of the backlight system 110 due to the low absorbance of the reflective surfaces provided by multilayer optical film back reflector 122. In contrast, the designer of a similar backlight system incorporating
10 conventional reflectors which absorb incident light must be concerned with the number of reflections experienced by the light before exiting the backlight and the resulting absorptive losses.

Although both the lamp cavity reflector 120 and back reflector 122 of backlight system 110 are described as being constructed of multilayer optical film
15 according to the present invention, it will be understood that only one of the reflectors 120 or 122 may be constructed of multilayer optical film while the other is constructed of conventional reflective materials. However, such a construction may not be preferred for certain applications due the absorption losses which would be experienced.

20 Figure 10 depicts, in a cross-sectional schematic view, an illustrative backlight system 210 which includes a light guide 212 and a light source 218. The light guide 212 includes a front surface 214 and a back surface 216. A lamp cavity reflector 220 is depicted as partially surrounding the light source 218 and coupling the same to the light guide 212. In most respects, the construction of backlight
25 system 210 is similar to the construction of system 110 described above.

Differences include the addition of a separate lamp cavity reflector 224 disposed about the outer surface of the multilayer optical film lamp cavity reflector 220 to prevent transmissive losses in the event that a less efficient multilayer optical
30 reflector is used. However, if a sufficiently efficient multilayer optical film is used, the reflector 224 may not be required.

An additional layer 226 is depicted as interposed between the back reflector 222 and the back surface 216 of the light guide 212. That additional layer preferably comprises a means of diffusing light directed towards back reflector 222. A means of diffusing light may be helpful in some backlight systems because typical
5 multilayer optical films provided as mirrors exhibit specular reflection which may be undesirable on some applications.

The diffusing means 226 can be provided in many different forms as long as it diffuses the specular component of light reflected from the multilayer optical film back reflector 222. It is preferred, however, that the diffusing means absorb a
10 minimum amount of incident light, thereby reducing its impact on the performance of the backlight system 210. It may also be preferred that the diffusing means 226 is polarization preserving (as shown below with respect to Figure 13) or polarization scrambling (as shown with respect to Figure 14).

Other means of diffusing light could include loading diffusing particles, such
15 as barium sulfate, in a coextruded skin layer located on the multilayer optical film back reflector 222. Alternately, the diffusing particles could be included within one of the layers in the stack, preferably near the surface on which light is incident. Diffusing layers could also be coated by extrusion coating on the multilayer optical film or they could be spread on the surface of the multilayer optical film using a
20 suitable solvent.

Another diffusing means could comprise a commercially available diffusing film located between the multilayer optical film back reflector 222 and the back surface 216 of light guide 212. One example of a diffusing film is DFA-12, available from Minnesota Mining and Manufacturing Company, St. Paul,
25 Minnesota.

In another variation, a diffusing adhesive could be used to attach the multilayer optical film back reflector 222 to the back surface 216 of the light guide 212. Example of diffusing adhesive is described below.

EXAMPLE 1: DIFFUSING ADHESIVE. A 10% solution of 100 micron diameter beads and dispersing the beads in a water based emulsion adhesive. An adhesive
30 containing 5% by weight of the microspheres, was coated out on a PET liner film

and was dried to form an 8.4 grain/4" x 6" adhesive layer. Diffusing adhesive was coated to 4 mils wet at 17 feet per minute. The drying oven was 30 feet in length. The drying temperature was 180° F.

5 Preparation of Styrene Particles

3 grams of poly(vinyl alcohol) and 9 grams of standapol-A (ammonium lauryl sulfate - Hercules) was dissolved in 480 grams of water. 2 grams of Lucidol™-75 (75% benzoyl peroxide - Elf Atochem) was dissolved in 120g of styrene. The above two mixtures were blended and emulsified in a Gaulin
10 homogenizer until the droplet size was approximately 2 microns. The emulsion was charged to a 1 liter reactor, heated to 80°C, degassed with argon and allowed to react for 12 hours.

Preparation of Pressure-Sensitive Adhesive Microparticles by Suspension

15 Polymerization Method

1 gram of sodium dodecyl benzene sulfonate was dissolved in 360 grams of deionized water. 2.4 grams of poly(ethylene oxide)₁₆ acrylate (PEO), 4.8 grams of acrylic acid and 1.05 grams of Lucidol™75 (75% benzoyl peroxide from Elf Atochem) were dissolved in 232.8 grams of iso-octyl acrylate (IOA). The above
20 mixture was emulsified in a Gaulin homogenizer such that the droplet size was 1 micron or less. This emulsion was then charged to 1 liter reactor, stirred at 400 RPM and heated to 65°C for 4 hours. The 97/2/1 IOA/AA/PEO resulting particles had a size of approximately 2 microns as viewed with an optical microscope and had an index of refraction of 1.47.

25

Light-Diffusing Adhesive Preparation

440 grams of the above Pressure Sensitive Adhesive Suspension was

30 mixture was neutralized with ammonium hydroxide to a pH of 8.3. The diffuser

adhesive solution was coated onto a PET release liner at 4 mils wet and dried at 65°C for 10 minutes.

If it is desired to preserve the polarization of the light exiting from the backlight system 210, e.g., where a liquid crystal display is being illuminated and the light source 218 emits polarized light, the diffusing particles used in the system 210 should be as spherical as possible to preserve polarization.

Conversely, if the backlight system 210 is being used in conjunction with a multilayer or other type of reflective polarizing film (not shown) located above the front surface 214 to recycle light having the "wrong" polarization it is desirable that the diffusing means also randomize polarization of the light to enhance that recycling process. An alternative construction is to use the polarization preserving diffuser and a birefringent film or skin layer to depolarize the light.

Figure 11a depicts, in a cross-sectional schematic view, an alternate illustrative backlight system 310. This backlight system illustrates the construction of a backlight system without a separate light guide as described in the above systems. Light guides, which are typically constructed of materials such as acrylic, add weight to the backlight system. As described below, the multilayer optical films described above present the opportunity to construct a highly efficient backlight system 310 which does not require a separate light guide.

The backlight system 310 includes a front surface 314 and a back surface 316 as well as a light source 318 and a lamp cavity mirror 320. The system 310 also preferably includes a diffusing means 326 to diffuse light directed towards the back reflector 316. The diffusing means 326 should have varied amounts of diffusion across the back surface of the backlight to achieve uniform output.

The front surface 314 of the backlight system 310 can contain the extraction mechanism used to allow for the uniform transmission of light out of the front surface 314 of the backlight system 310.

One useful extraction mechanism is to construct the front surface 314 from multilayer optical films which provide extraction of light from the system 310 to allow light to exit the system 310. As shown in Figure 11b, which is a plan view of the front of backlight system 310, it may be preferred in certain applications for the

number and/or area of voids 315 to increase as distance from the light source 318 increases. In a system such as that depicted in Figures 11a and 11b, it may be desirable to place a diffusing layer above the front surface 314 to obscure the voids 315. If such a diffusing layer is provided, the diffusing layer 326 depicted as lying
5 between front surface 314 and back reflector 316 may be unnecessary.

Figure 12 is a cross-sectional schematic view, another alternate illustrative backlight system 410 which includes a light guide 412 and a light source 418. The light guide 412 includes a front surface 414 and a back surface 416. A lamp cavity reflector 420 is depicted as partially surrounding the light source 418 and coupling
10 the same to the light guide 412. In most respects, the construction of backlight system 410 is similar to the construction of systems 110 and 210 described above. Light guide 412 is also depicted with diffusing extraction dots 417 located on its back surface 416, although any extraction mechanism could be used as described above.

15 One of the primary differences is that the multilayer optical film back reflector 422 is provided with a structured surface facing the back surface of the light guide 412. It is preferred that structured surface be designed to reflect light upward towards the front surface 414 of light guide 412 within a desired range of angles. This is particularly useful if the backlight system 410 will be used with a
20 structured partially reflective film located in between the backlight and the viewer. Exemplary micro-replicated structured partially reflective films are available as Brightness Enhancement Film and Optical Lighting Film, both of which are available from Minnesota Mining and Manufacturing Company, St. Paul, Minnesota.

25 Structured partially reflective films typically have excellent reflectivity over certain ranges of angles but high transmission over others. Because the range of angles within which light is reflected from the structured back reflector 422 can be somewhat controlled, the use of back reflector 422 with a structured surface and a structured partially reflective film located in between the backlight and the viewer
30 number of reflections needed before light can be refracted through the structured film, thereby further limiting any absorptive losses in the system 410.

Another alternative to providing the structured surface directly in the back reflector 422, would be to interpose a layer of structured film between the back reflector and the back surface of the light guide.

When the reflective polarizer 419 is used to polarize light entering the guide
5 420, as shown in Figure 13, then the guide, the light extracting dots and the reflective multilayer mirror 420 are preferably polarization preserving.

In light recycling backlights such as that shown in Figure 14, where reflective polarizers 523, brightness enhancement film 525 or combination thereof are placed on top of the light guide, the multilayer reflector 520 is preferably both
10 diffuse scattering and polarization scrambling.

The present invention has been described above with respect to illustrative examples to which modifications may be made without departing from the scope of the invention as defined by the appended claims.

Claims

1. A backlight system comprising:
 - a) a light guide defining a back surface;
 - b) a light source optically connected to the light guide, the light source emitting light into the light guide; and
 - c) a back reflector proximate the back surface of the light guide, the back reflector comprising a multilayer optical film which reflects at least about 80% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal.
2. A backlight system according to claim 1, wherein the back reflector reflects at least about 90% of normally incident light.
3. A backlight system according to claim 1, wherein the back reflector reflects at least about 95% of normally incident light.
4. A backlight system according to claim 1, wherein the back reflector reflects at least about 98% of normally incident light.
5. A backlight system according to claim 1, wherein the back reflector reflects at least about 99% of normally incident light.
6. A backlight system according to claim 1, wherein the back reflector reflects at least about 90% of the light incident at an angle of 60 degrees from normal.
7. A backlight system according to claim 1, wherein the back reflector reflects at least about 95% of the light incident at an angle of 60 degrees from normal.
8. A backlight system according to claim 1, wherein the back reflector reflects at least about 98% of the light incident at an angle of 60 degrees from normal.

9. A backlight system according to claim 1, wherein the back reflector reflects at least about 99% of the light incident at an angle of 60 degrees from normal.
10. A backlight system according to claim 1, further comprising diffusing means for diffusing light reflected from the back reflector towards the back surface of the light guide.
11. A backlight system according to claim 10, wherein the diffusing means comprises diffusing particles within at least one layer of the multilayer optical film.
12. A backlight system according to claim 10, wherein the diffusing means comprises diffusing particles located on a surface of the multilayer optical film.
13. A backlight system according to claim 10, wherein the diffusing means comprises a diffusing film located between the back reflector and the back surface of the light guide.
14. A backlight system according to claim 1, wherein the back surface of the light guide is formed by the back reflector.
15. A backlight system according to claim 1, further comprising a lamp cavity reflector located about at least a portion of the light source, the lamp cavity reflector directing light from light source generally towards an edge of the light guide, the lamp cavity reflector further comprising a multilayer optical film which reflects at least about 80% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal.

16. A backlight system according to claim 1, further comprising a lamp cavity reflector located about at least a portion of the light source, the lamp cavity reflector directing light from light source generally towards an edge of the light guide, the lamp cavity reflector further comprising a multilayer optical film which reflects at least about 80% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal.

17. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 95% of normally incident light.
18. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 98% of normally incident light.
19. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 99% of normally incident light.
20. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 90% of the light incident at an angle of 60 degrees from normal.
21. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 95% of the light incident at an angle of 60 degrees from normal.
22. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 98% of the light incident at an angle of 60 degrees from normal.
23. A backlight system according to claim 15, wherein the lamp cavity reflector reflects at least about 99% of the light incident at an angle of 60 degrees from normal.
24. A backlight system comprising:
 - a) a light guide defining a back surface;

c) a back reflector proximate the back surface of the light guide, the back reflector comprising a multilayer optical film which reflects at least about 90% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal; and

d) a lamp cavity reflector located about at least a portion of the light source, the lamp cavity reflector directing light from light source generally towards an edge of the light guide, the lamp cavity reflector further comprising the multilayer optical film.

25. A backlight system according to claim 24, further comprising diffusing means for diffusing light reflected from the back reflector towards the back surface of the light guide.

26. A backlight system according to claim 1, wherein the multilayer optical film further comprises:

(a) a first layer comprising an oriented birefringent polymer, the first layer having an average thickness of not more than about 0.5 microns; and

(b) a second layer of a selected second polymer, each second layer having an average thickness of not more than 0.5 microns.

27. A backlight system according to claim 26, wherein the first layer of the multilayer optical film comprises a crystalline naphthalene dicarboxylic acid polyester.

28. A backlight system according to claim 26, wherein the multilayer optical film comprises a plurality of the first and second layers, wherein one of the second layers is located between each adjacent pair of first layers.

layers of the multilayer optical film are adhered to each other



30. A backlight system according to claim 26, wherein the multilayer optical film comprises at least fifty of each of the first and second layers.
31. A backlight system according to claim 26, wherein the oriented birefringent polymer has been stretched in at least two in-plane directions.
32. A backlight system according to claim 26, wherein the oriented birefringent polymer is more birefringent than the second polymer, and further wherein the refractive index of one polymer is higher than the other polymer.
33. A backlight system according to claim 32, wherein the higher index of refraction is at least 0.05 higher.
34. A backlight system according to claim 32, wherein the higher index of refraction is at least 0.10 higher.
35. A backlight system according to claim 32, wherein the higher index of refraction is at least 0.20 higher.
36. A backlight system according to claim 27, wherein the naphthalene dicarboxylic acid polyester is a poly(ethylene naphthalate).
37. A backlight system according to claim 27, wherein the naphthalene dicarboxylic acid polyester is a copolyester comprising naphthalate units and terephthalate units.
38. A backlight system according to claim 27, wherein the second polymer is a poly(ethylene terephthalate).
39. A backlight system according to claim 38, wherein the second polymer comprises naphthalene units.


40. A backlight system according to claim 38, wherein the second polymer is a copolyester comprising naphthalate units and terephthalate units.
41. A backlight system according to claim 27, wherein the second polymer is a polystyrene.
42. A backlight system according to claim 27, wherein the second polymer is a fluoropolymer.
43. A backlight system according to claim 27, wherein the second polymer is a polyacrylate, polymethacrylate, or polyolefin.
44. A backlight system comprising:
- a) a light guide defining a back surface;
 - b) a light source optically connected to the light guide, the light source emitting light into the light guide;
 - c) a back reflector proximate the back surface of the light guide, the back reflector comprising a multilayer optical film which reflects at least about 90% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal, the multilayer optical film further comprising:
 - (1) a first layer comprising a biaxially oriented birefringent polymer, the first layer having an average thickness of not more than about 0.5 microns; and
 - (2) a second layer of a selected second polymer, each second layer having an average thickness of not more than 0.5 microns; and
 - d) a lamp cavity reflector located about at least a portion of the light source, the lamp cavity reflector directing light from light source generally towards


45. A backlight system comprising:
- a) a light guide defining a back surface;
 - b) a light source optically connected to the light guide, the light source emitting light into the light guide; and
 - c) a lamp cavity reflector located about at least a portion of the light source, the lamp cavity reflector directing light from light source generally towards an edge of the light guide, the lamp cavity reflector further comprising a multilayer optical film which reflects at least about 80% of normal light and at least about 80% of light incident at an angle of 60 degrees from normal.
46. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 90% of normally incident light.
47. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 95% of normally incident light.
48. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 98% of normally incident light.
49. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 99% of normally incident light.
50. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 90% of the light incident at an angle of 60 degrees from normal.
51. A backlight system according to claim 45, wherein the lamp cavity reflector


52. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 98% of the light incident at an angle of 60 degrees from normal.


53. A backlight system according to claim 45, wherein the lamp cavity reflector reflects at least about 99% of the light incident at an angle of 60 degrees from normal.

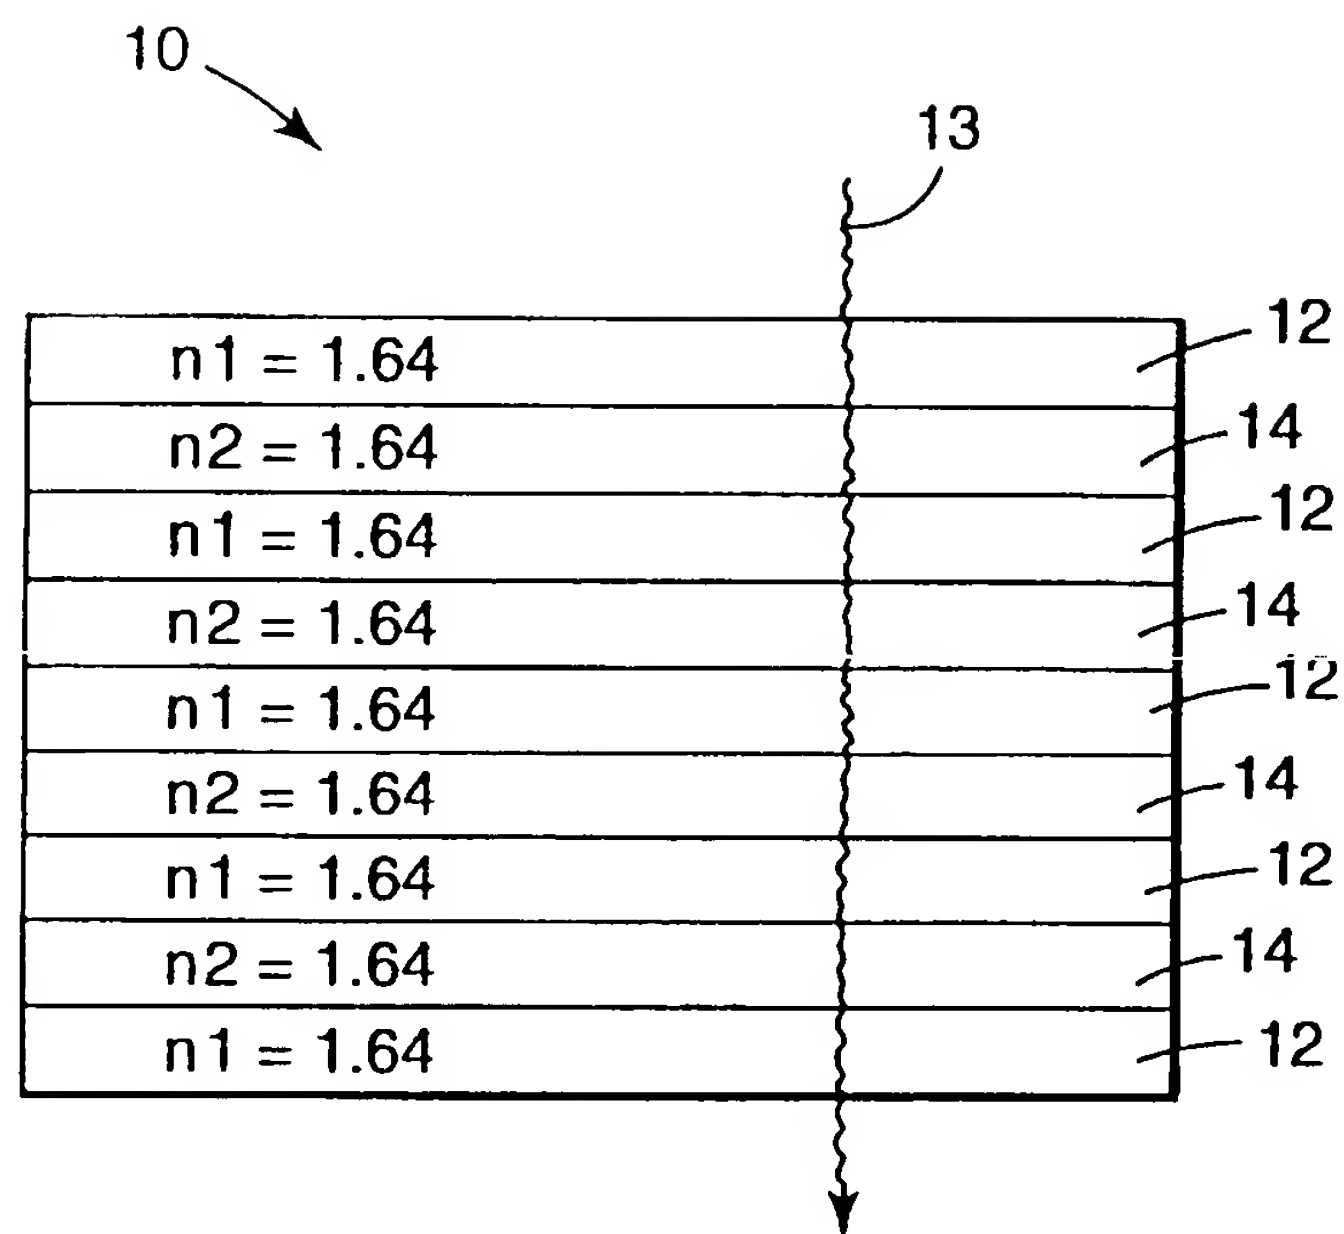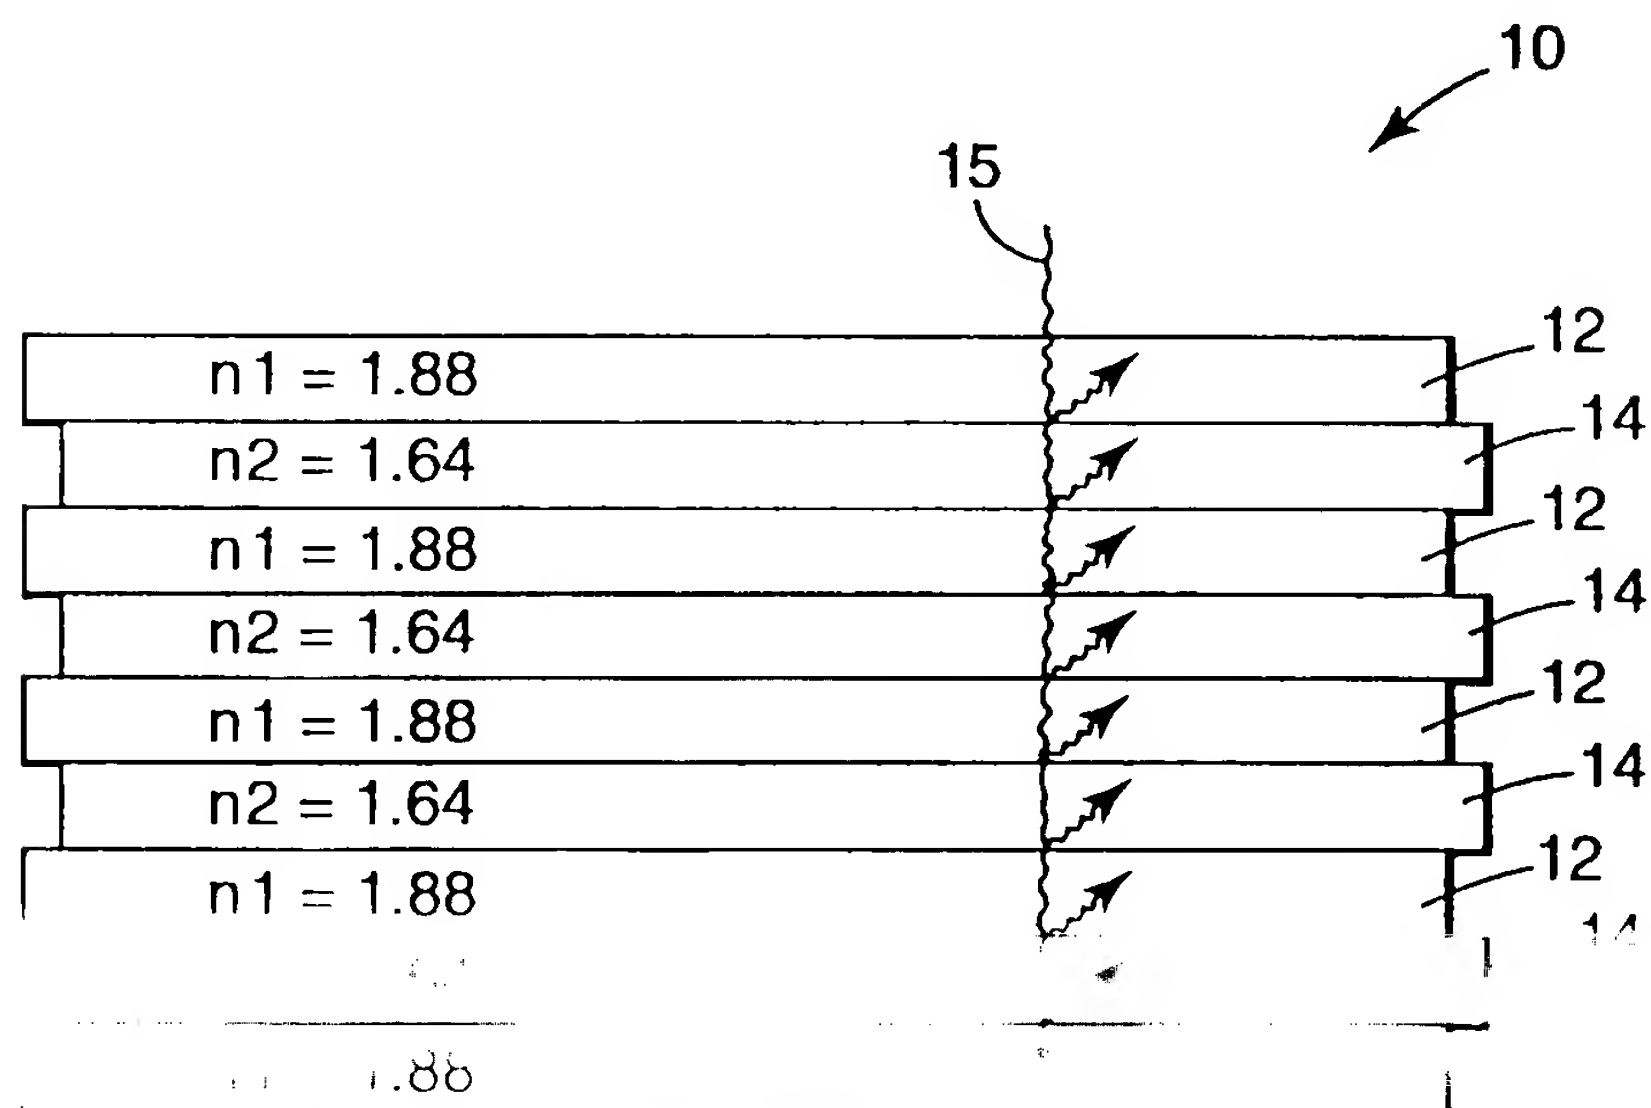
**Fig. 1a****Fig. 1b**

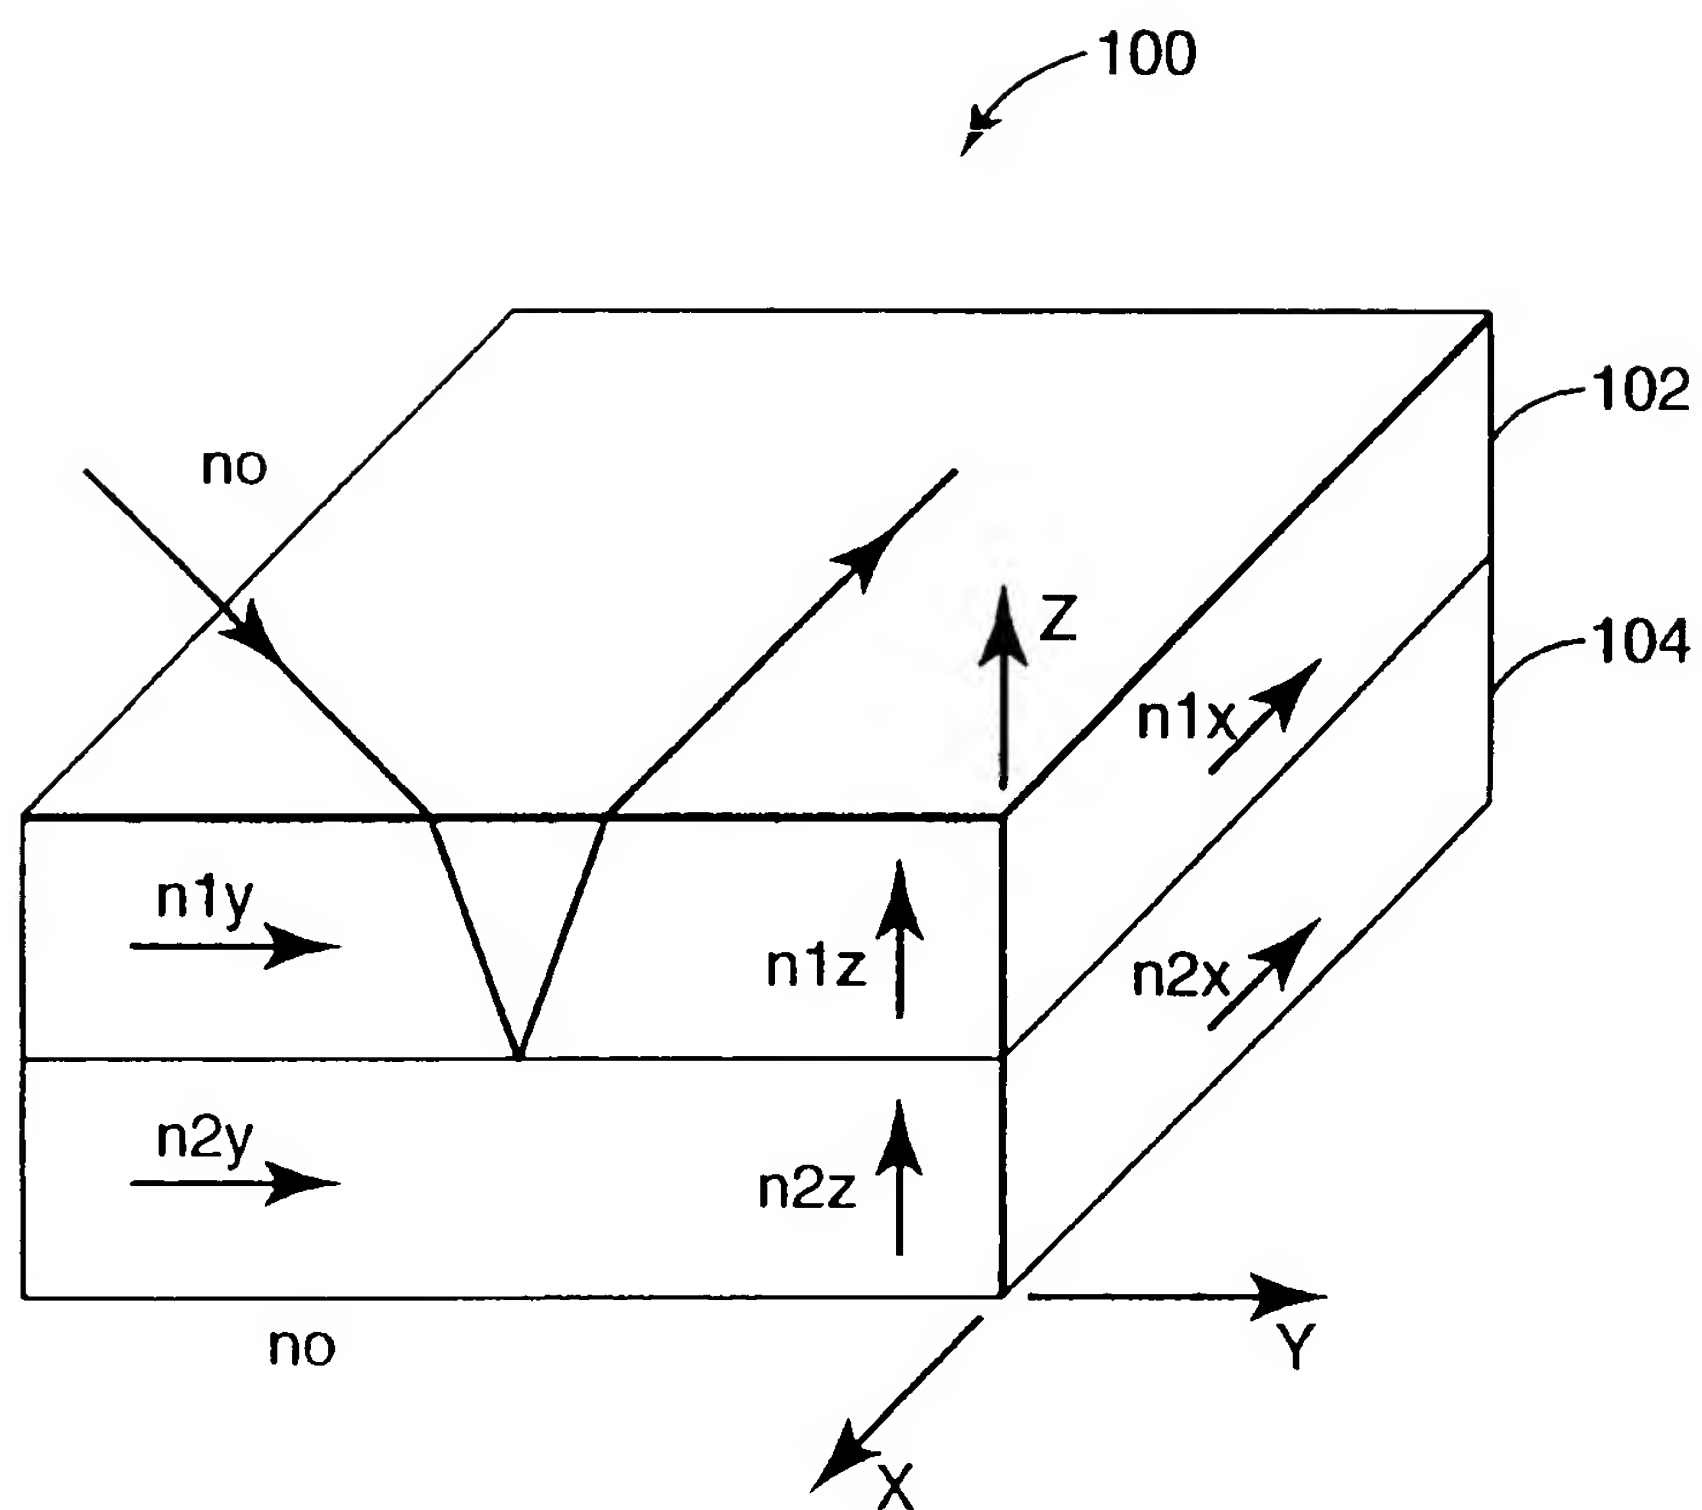
**Fig. 2**

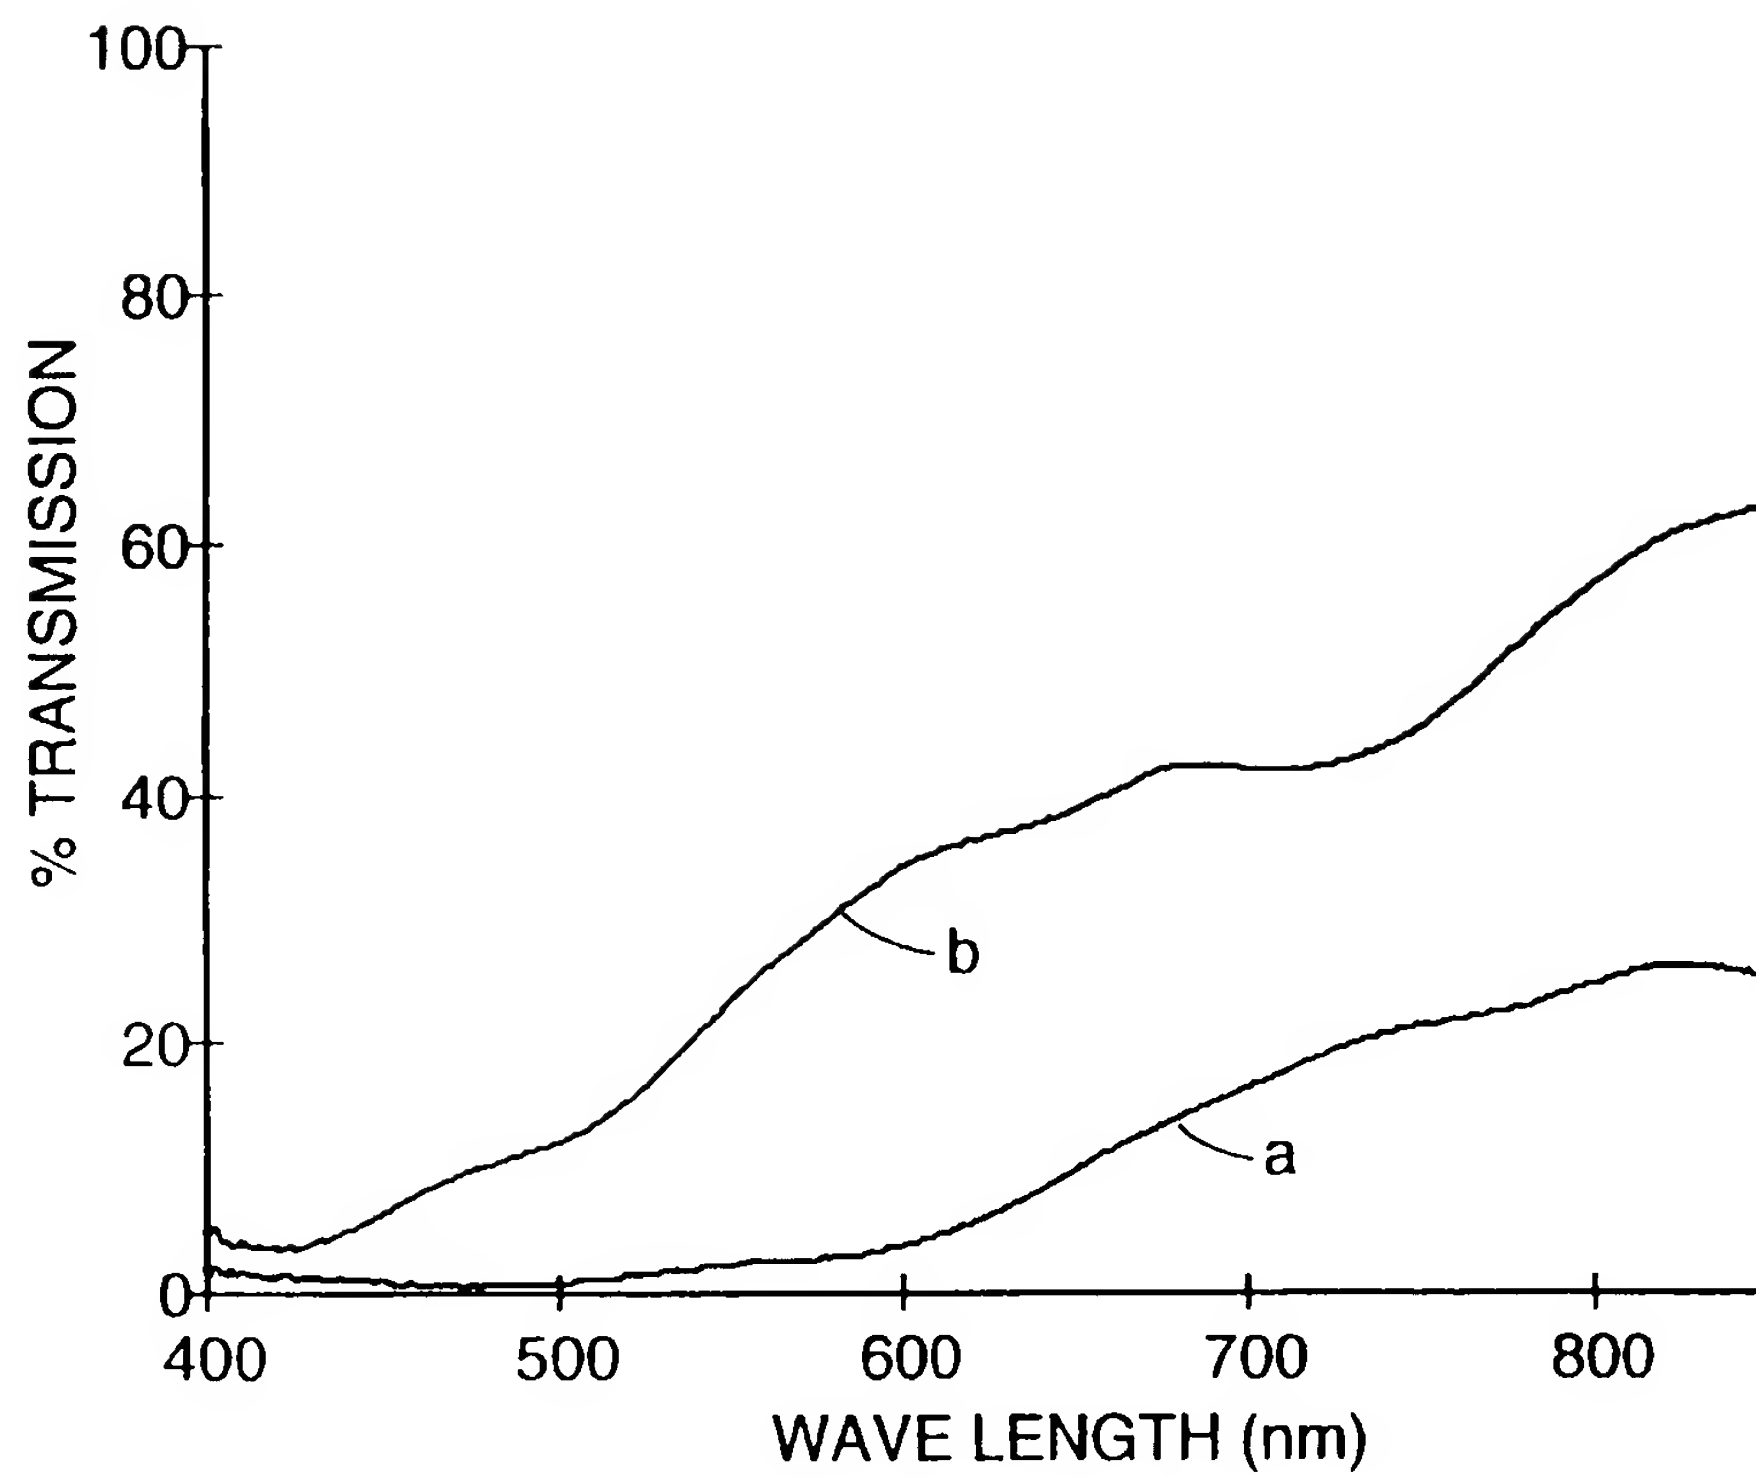***Fig 3***

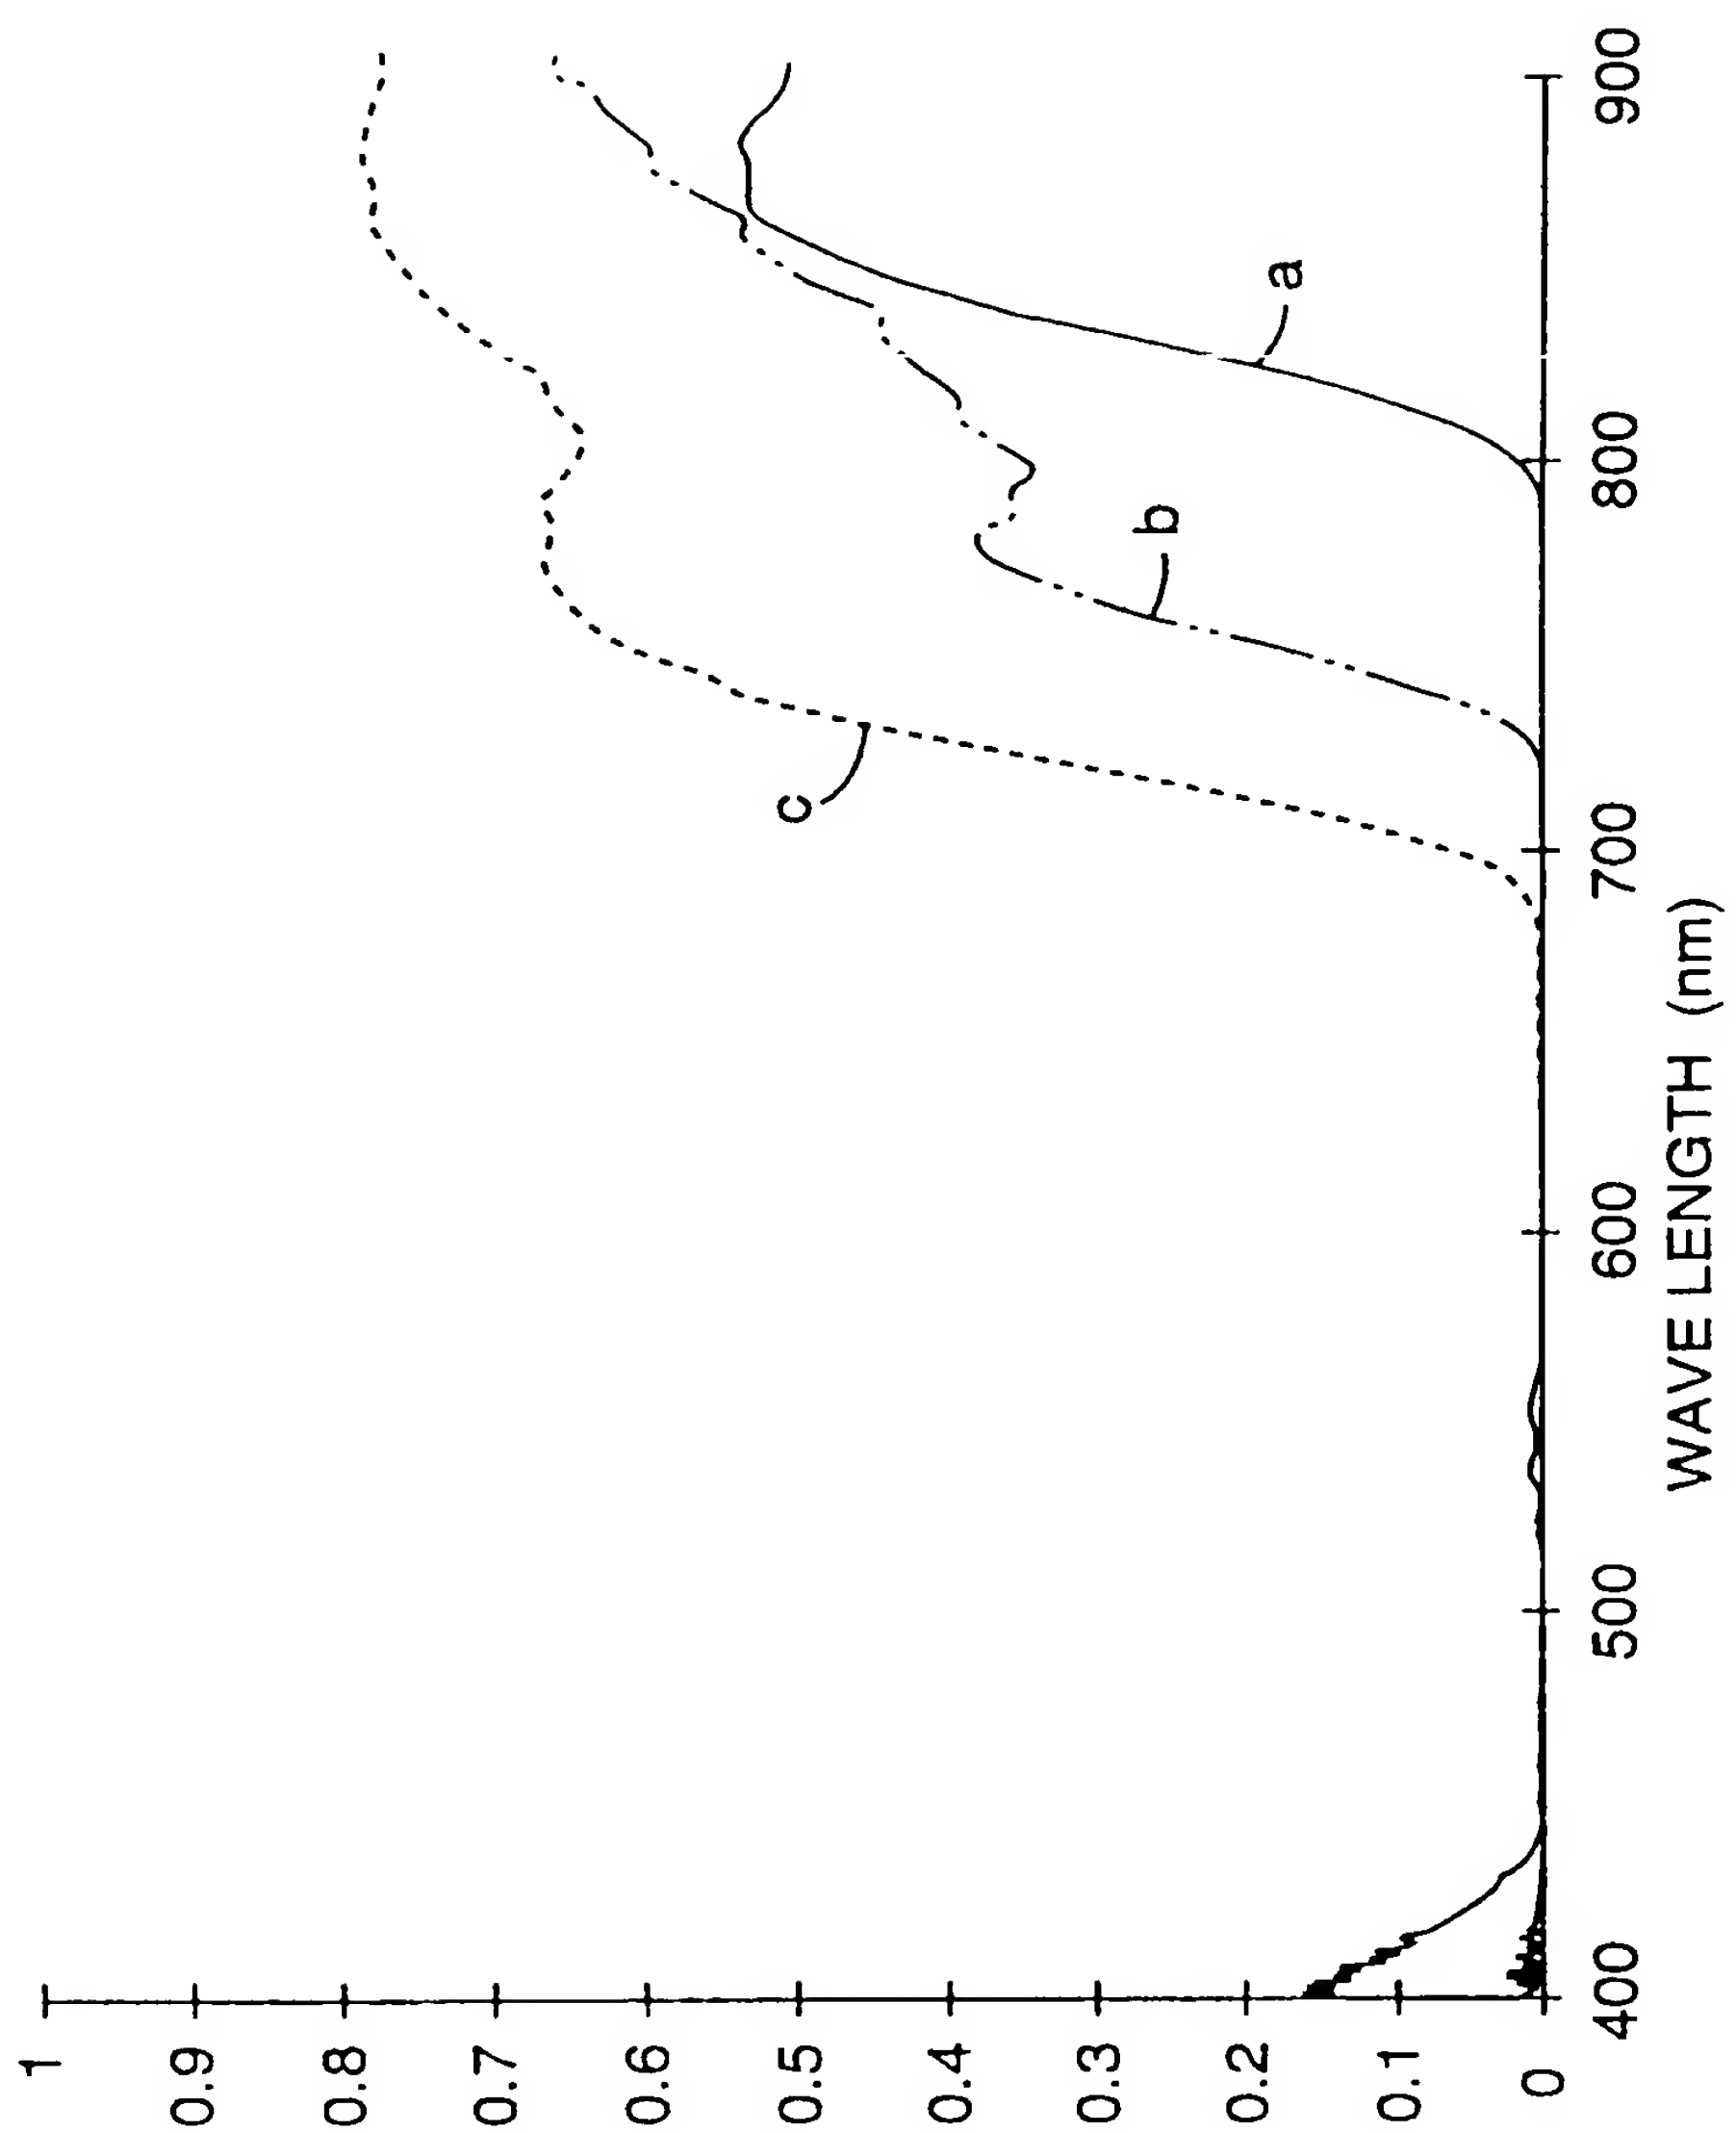**Fig. 4**

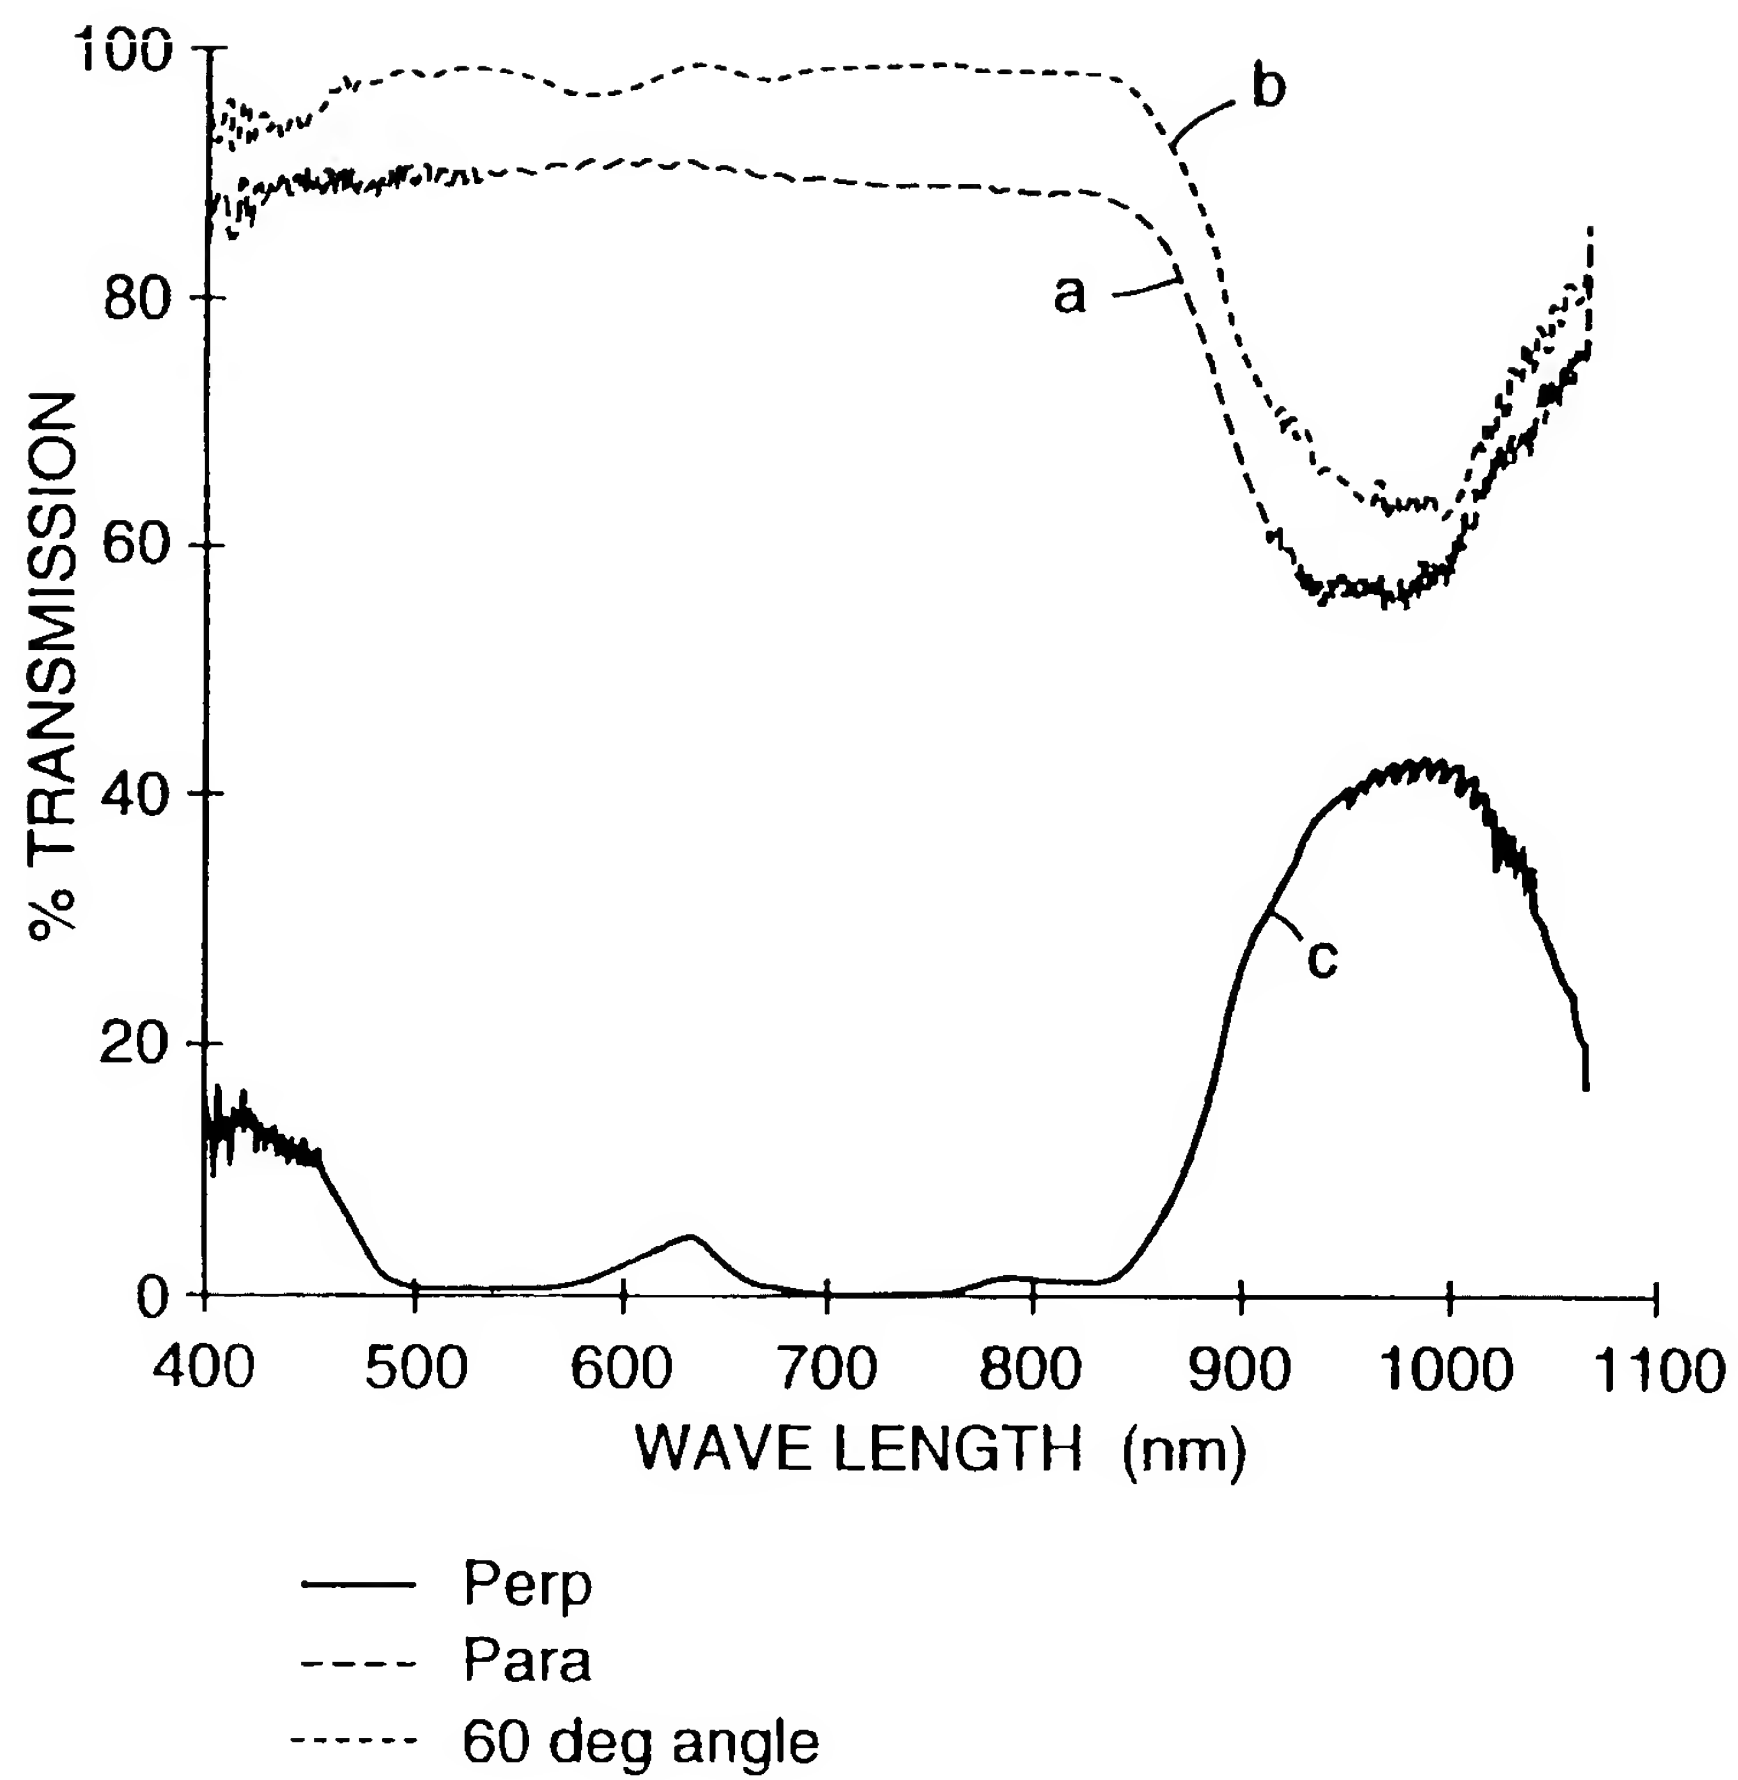**Fig. 5**

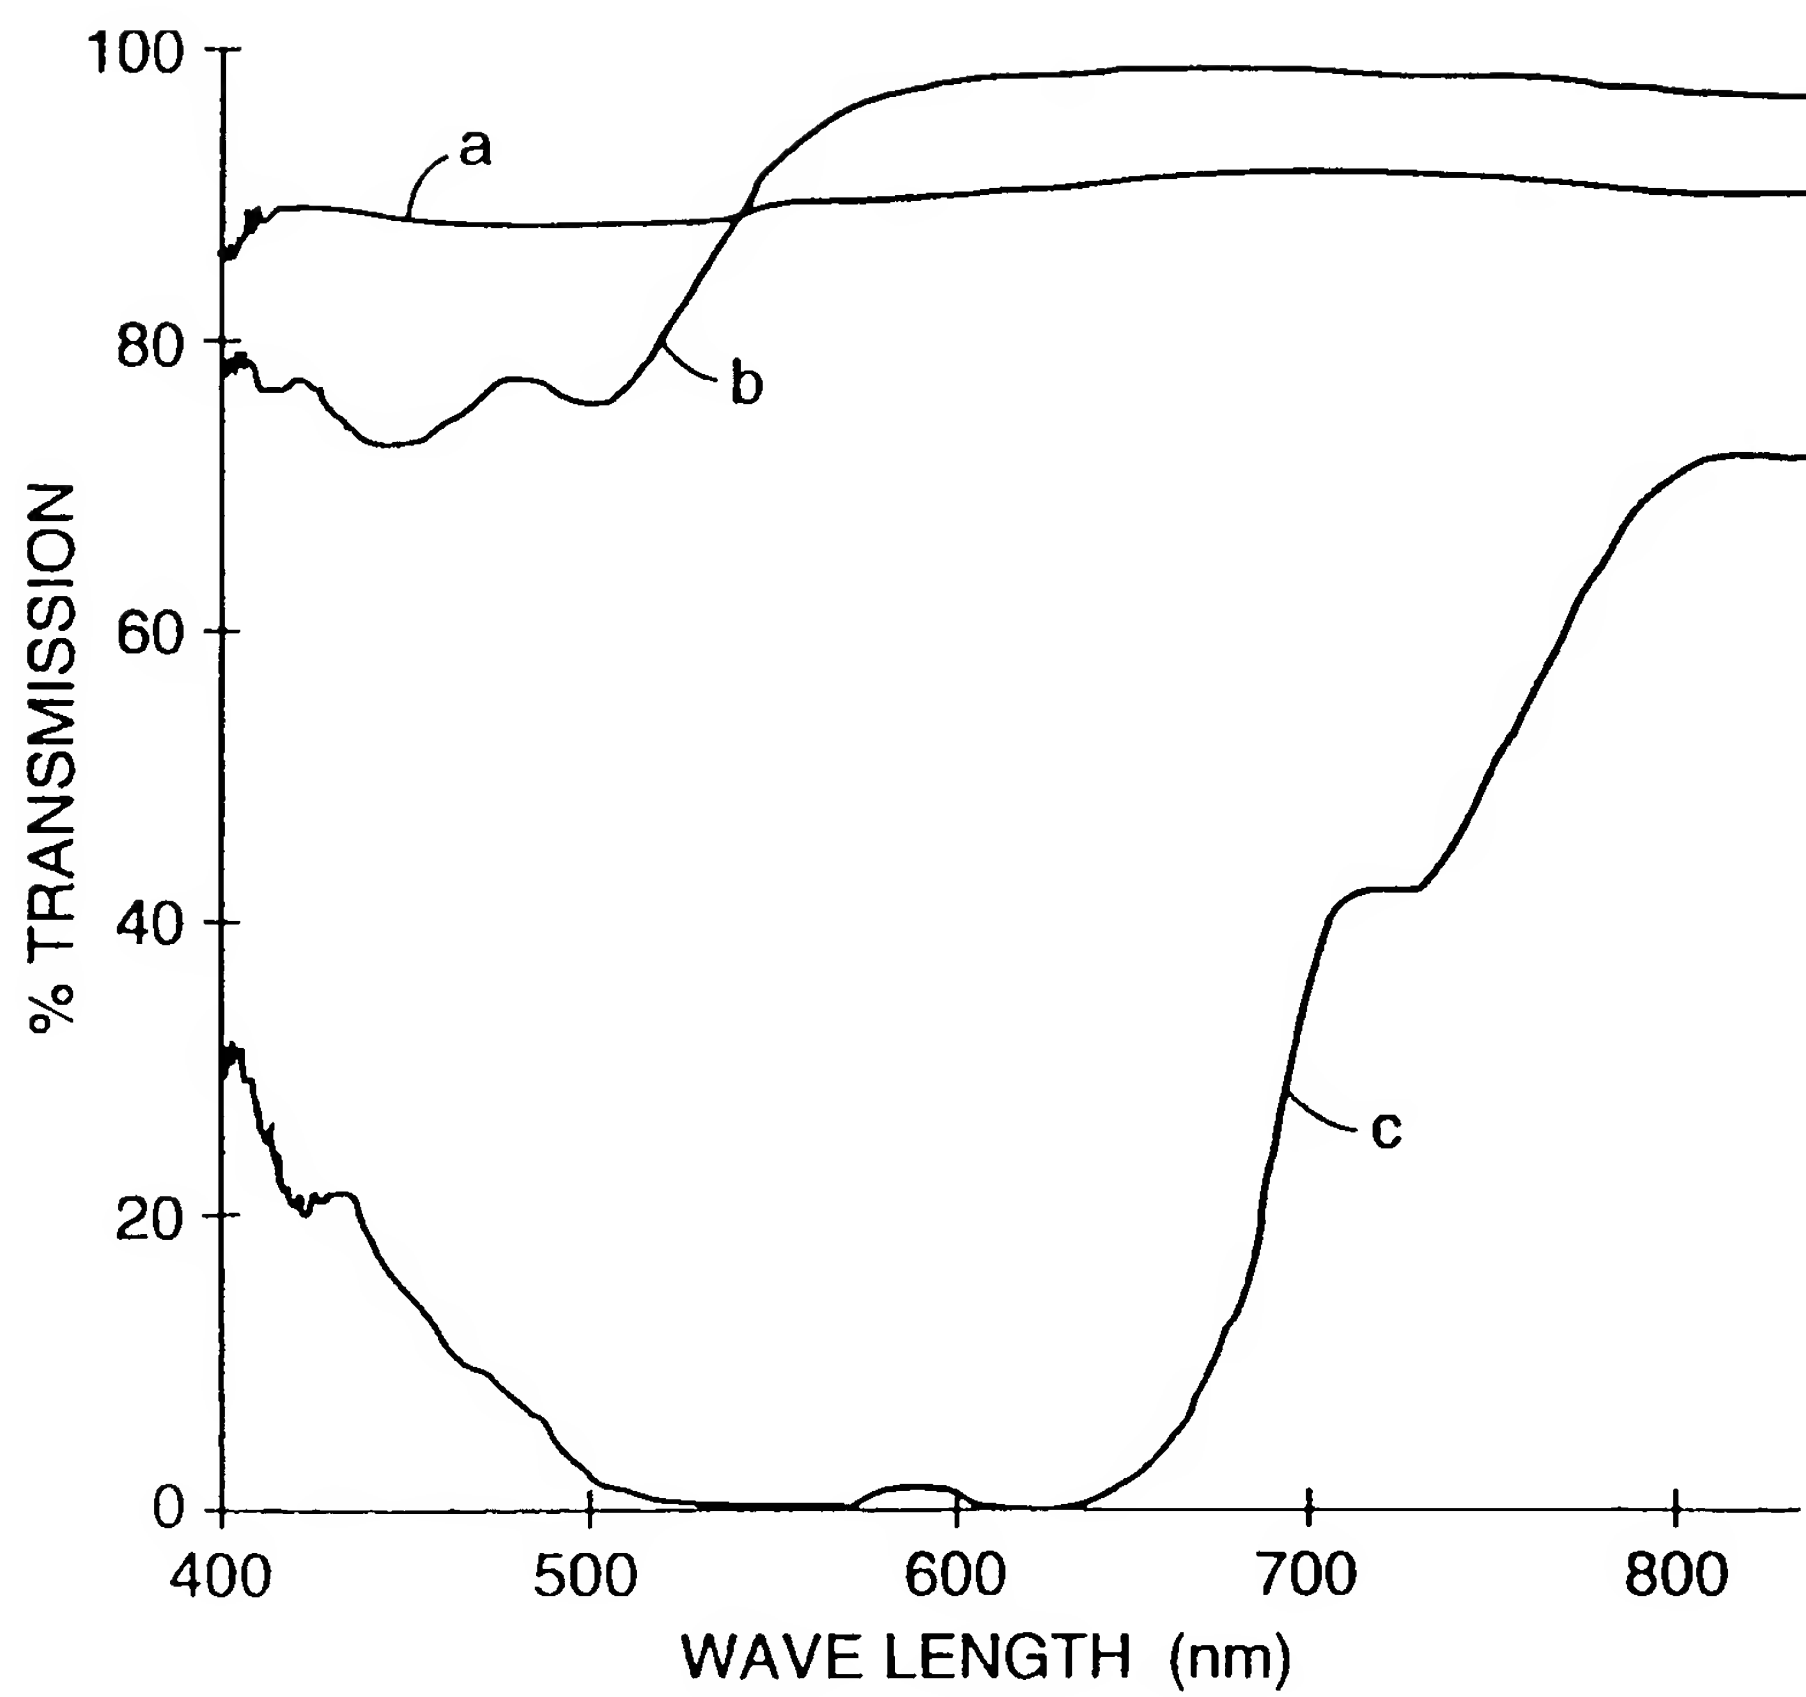***Fig. 6***

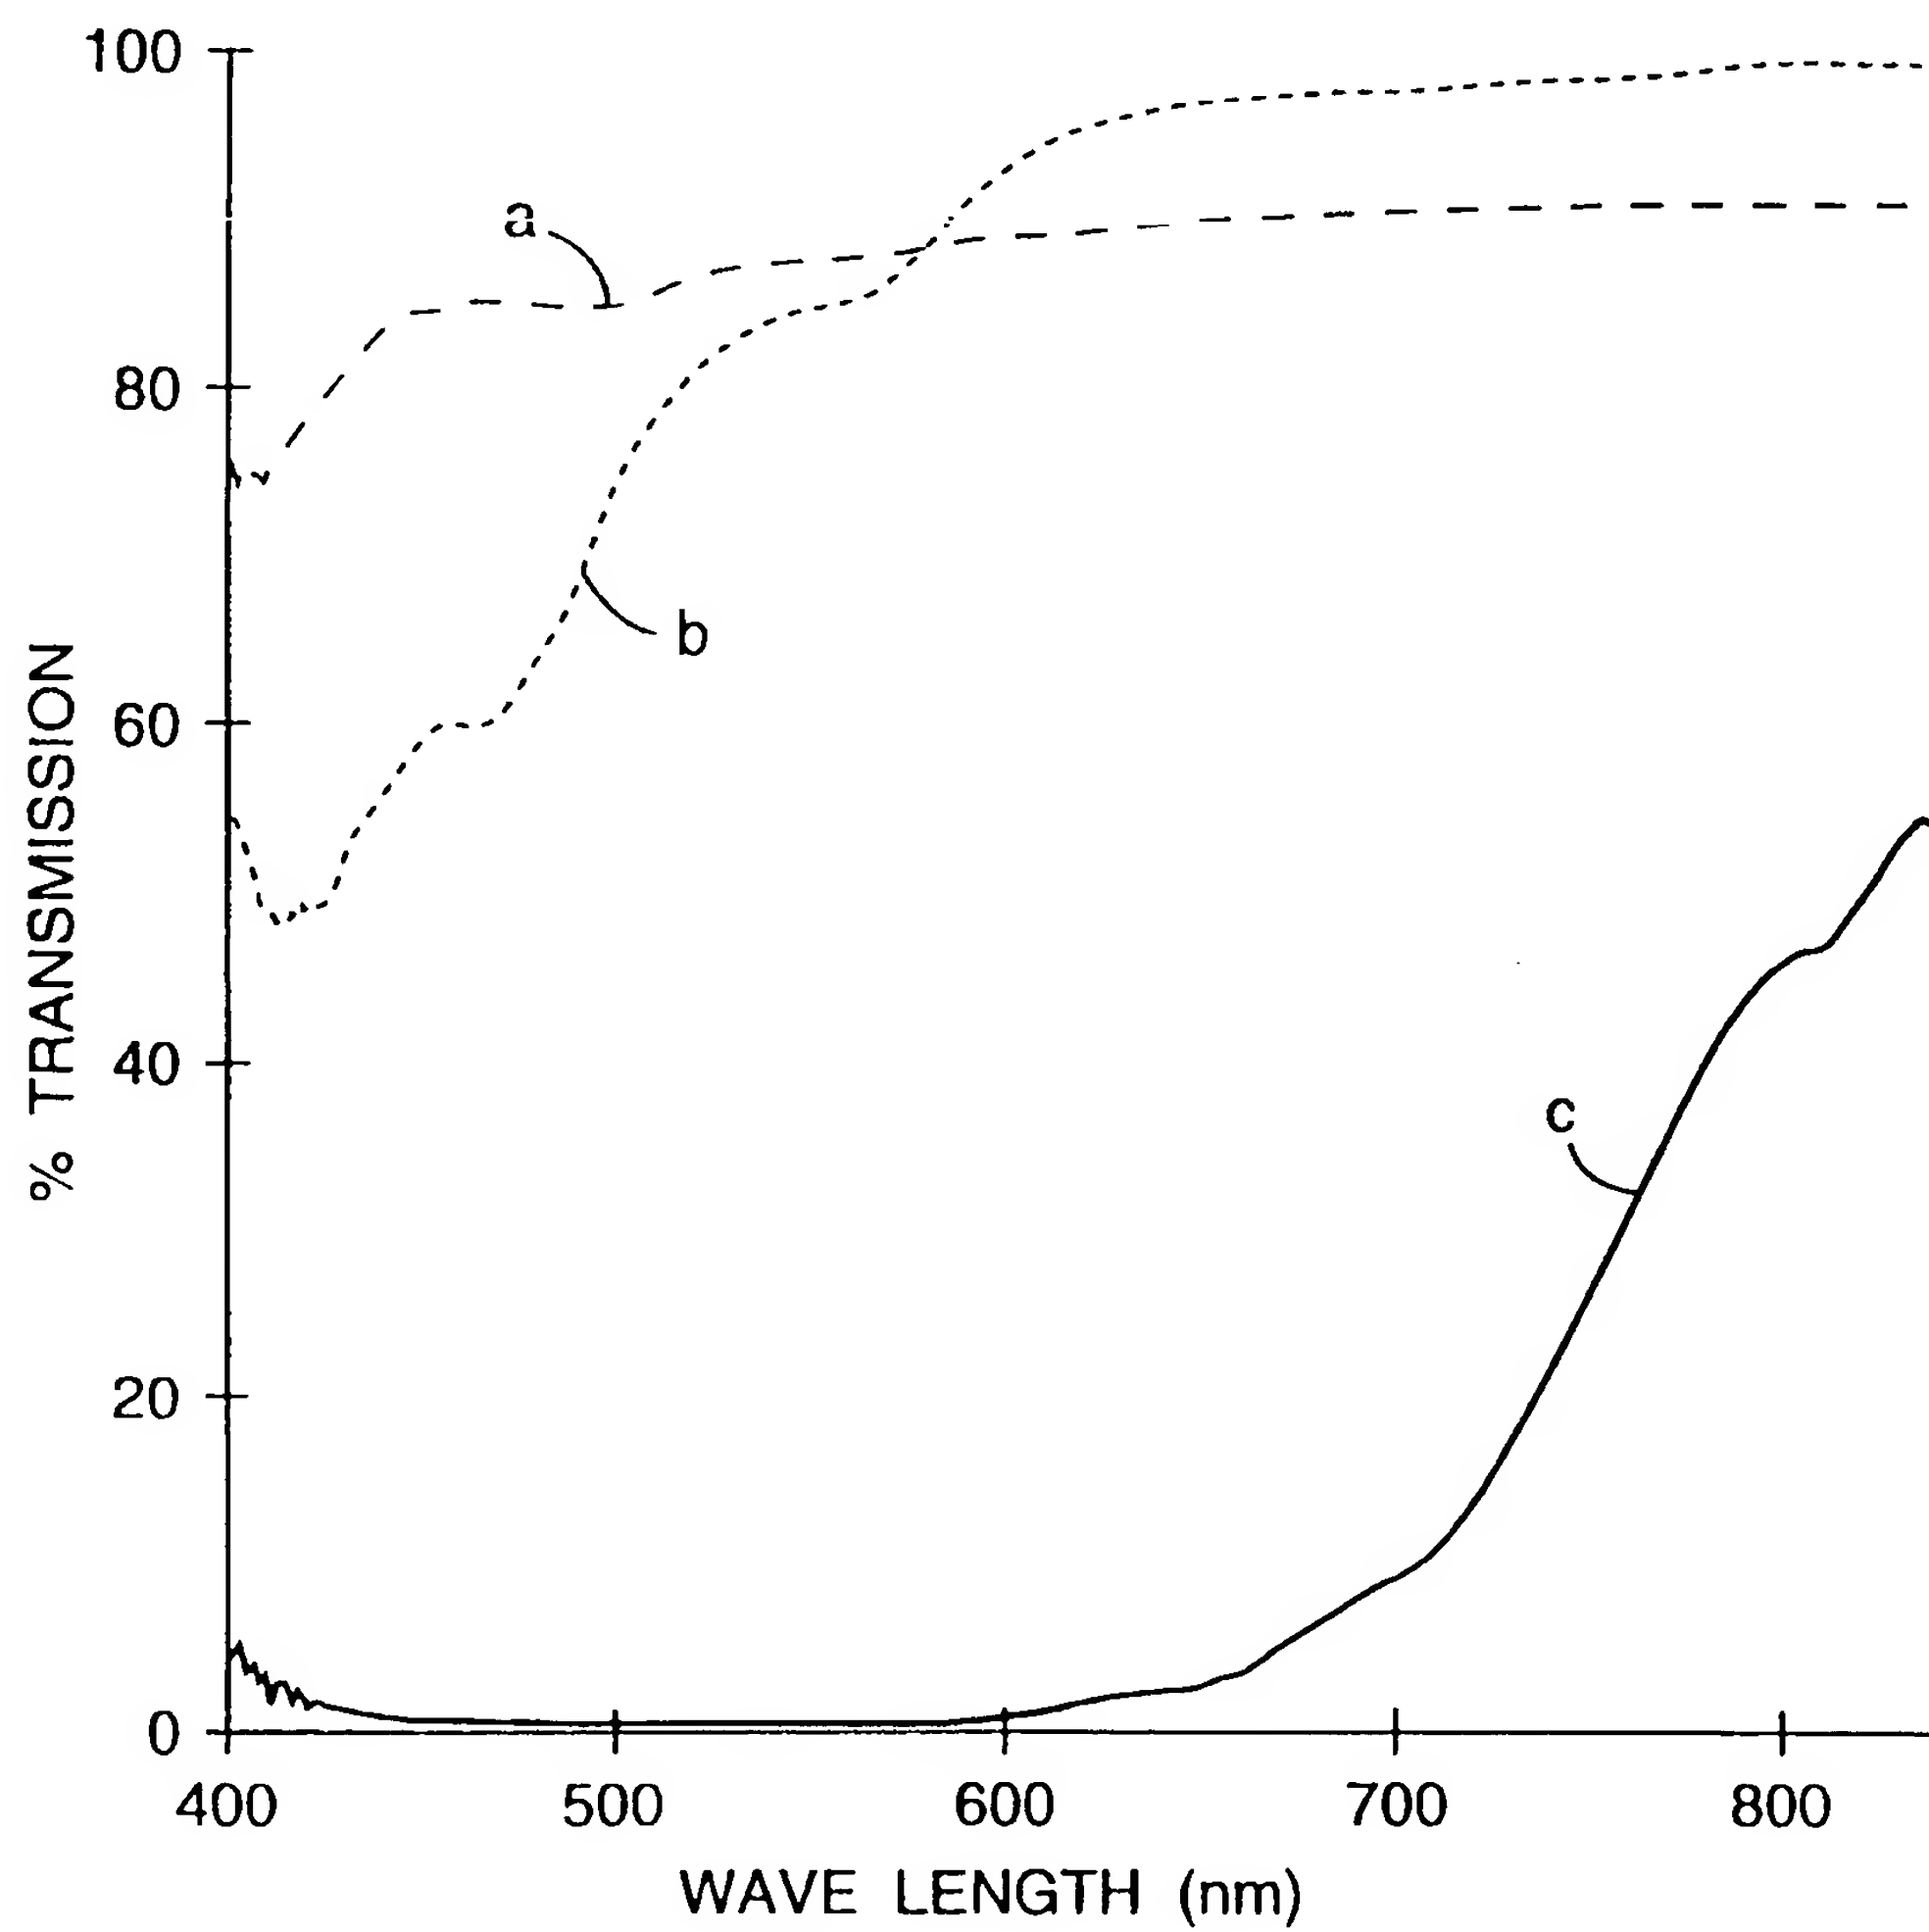**Fig. 7a**









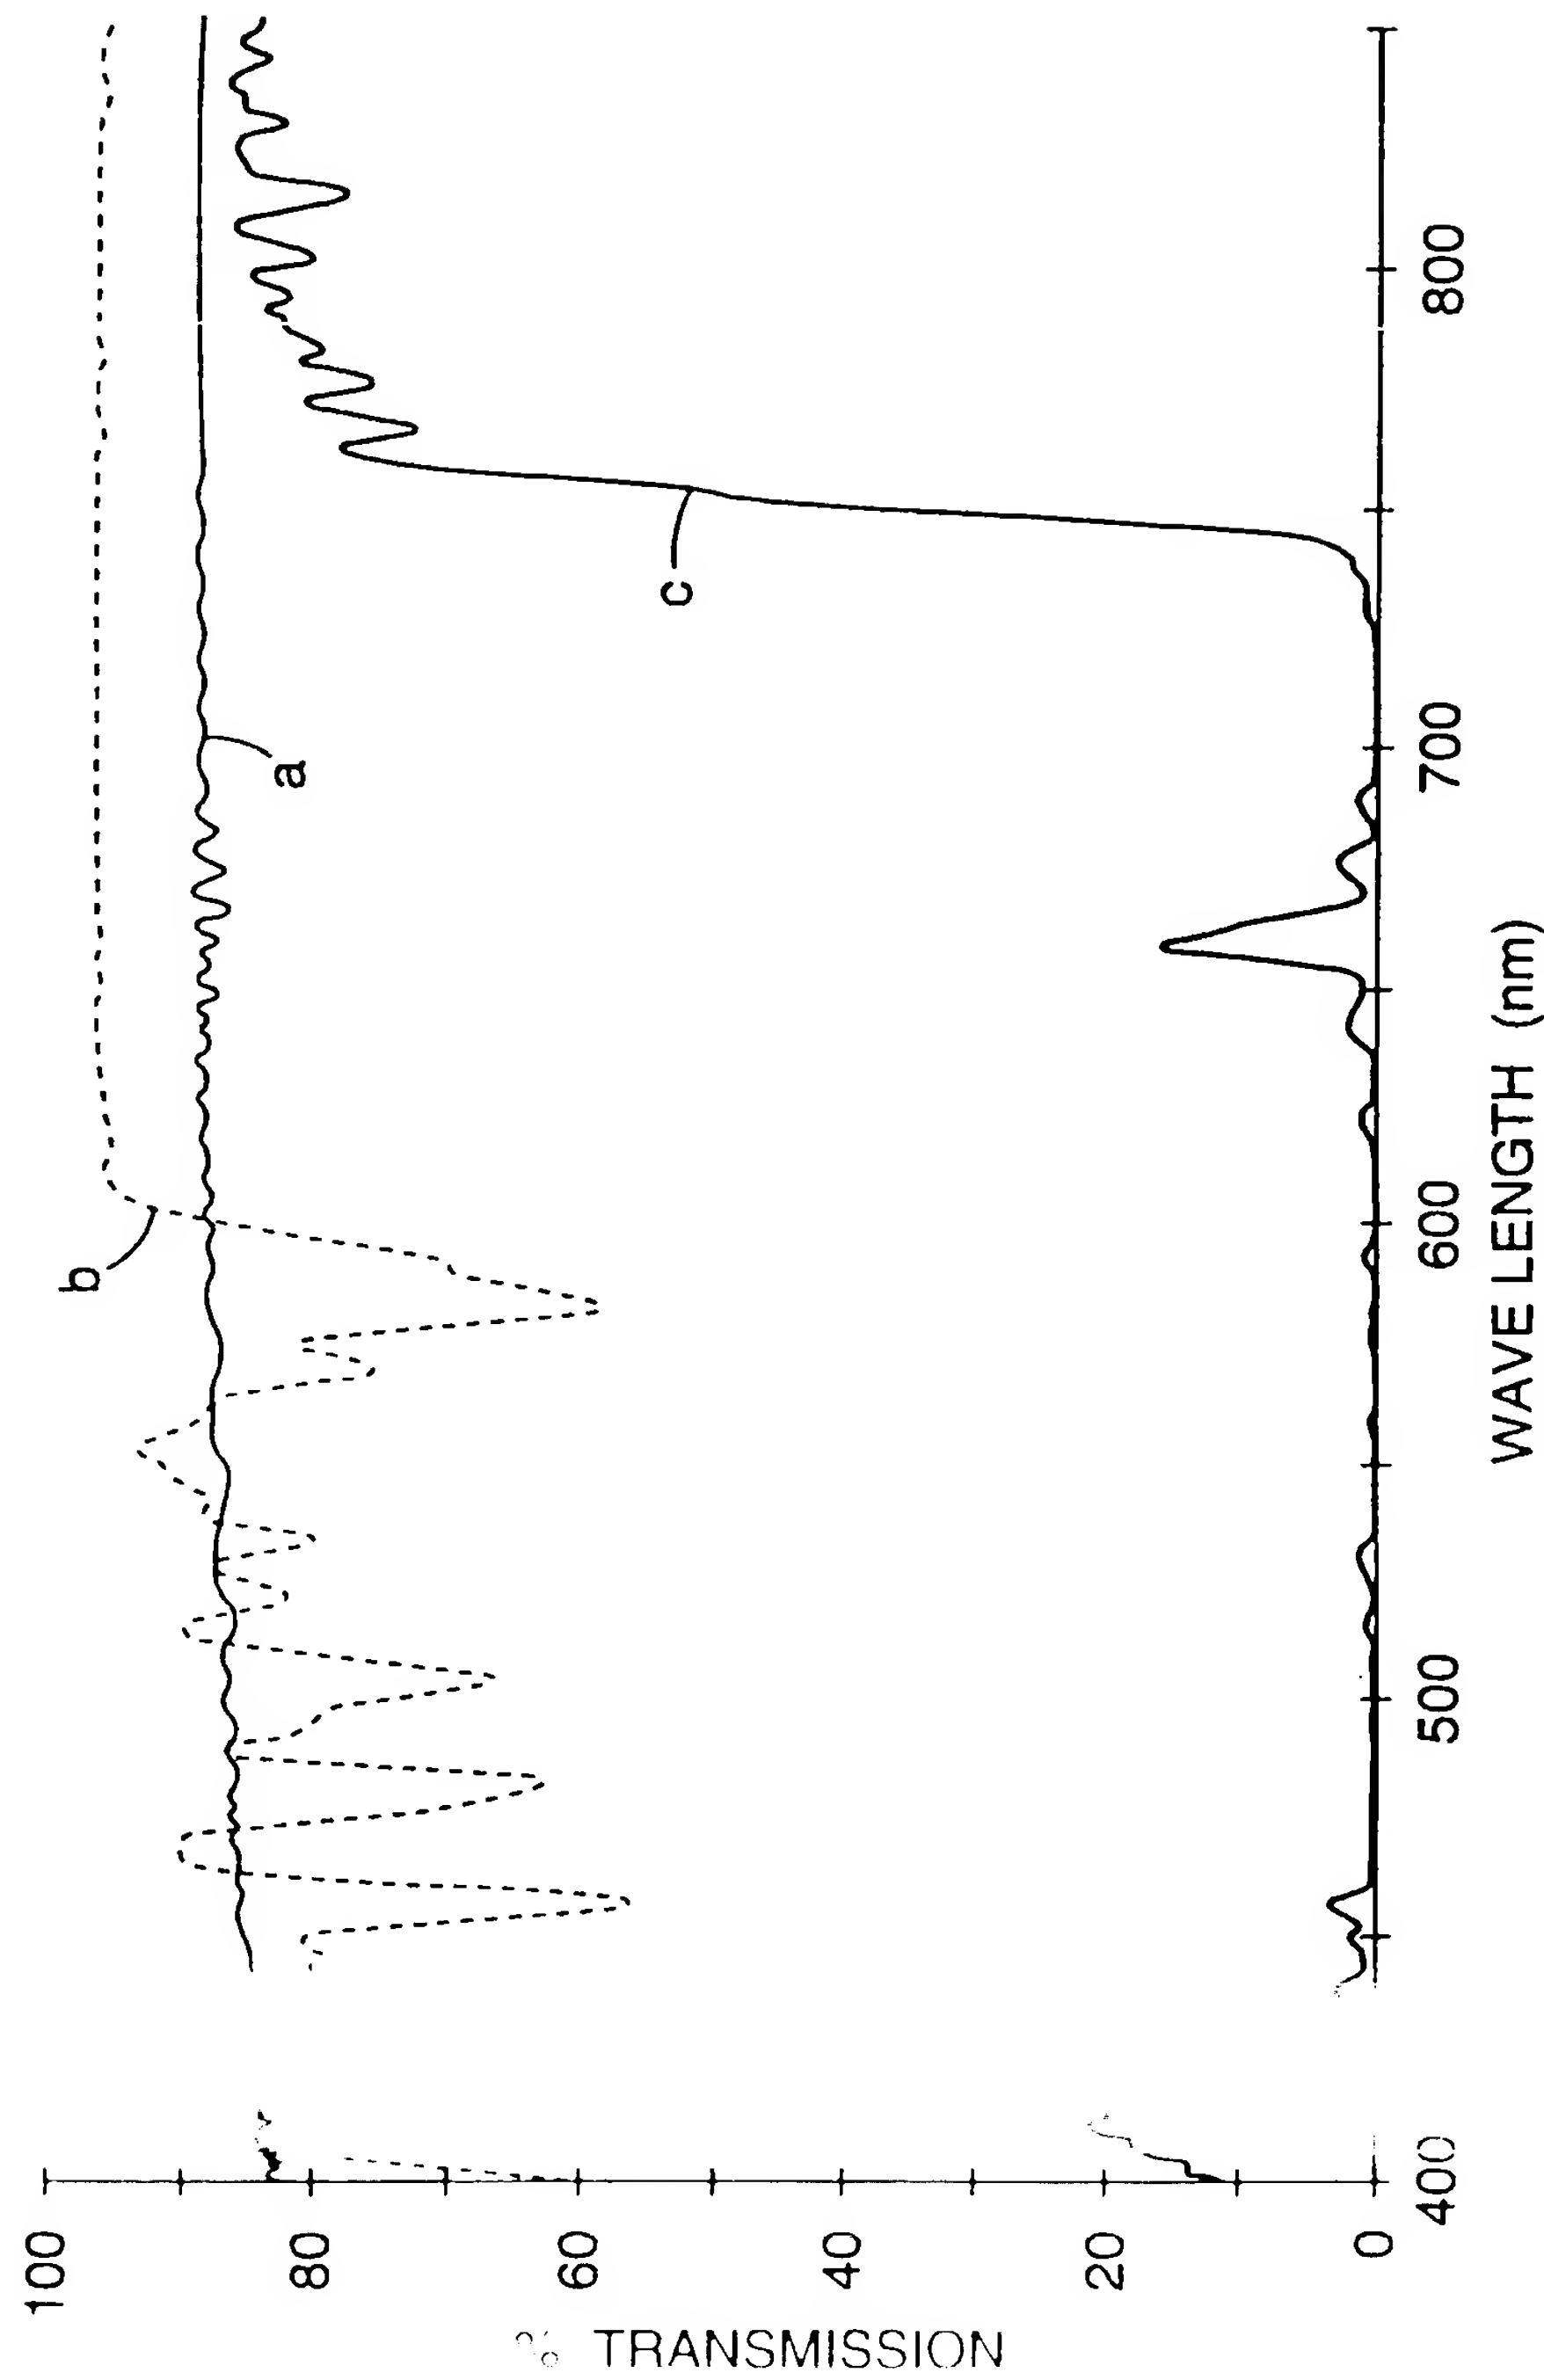


Fig. 7b

***Fig.8***

10/11

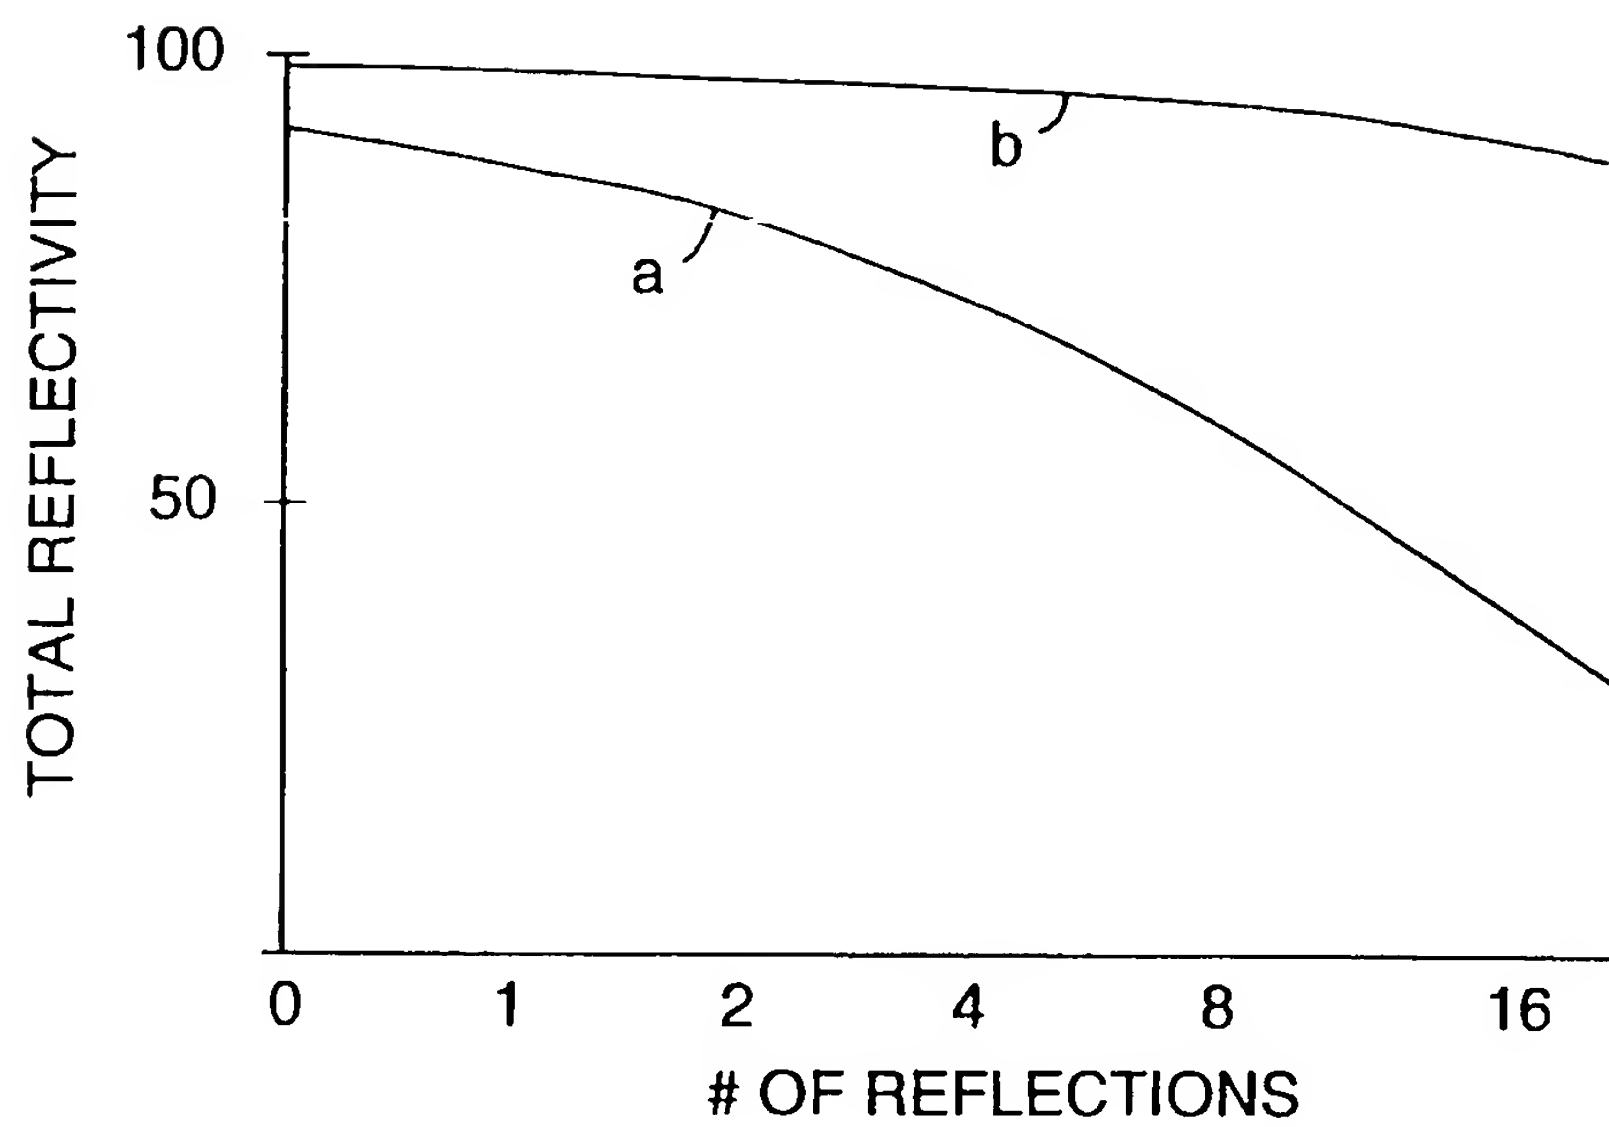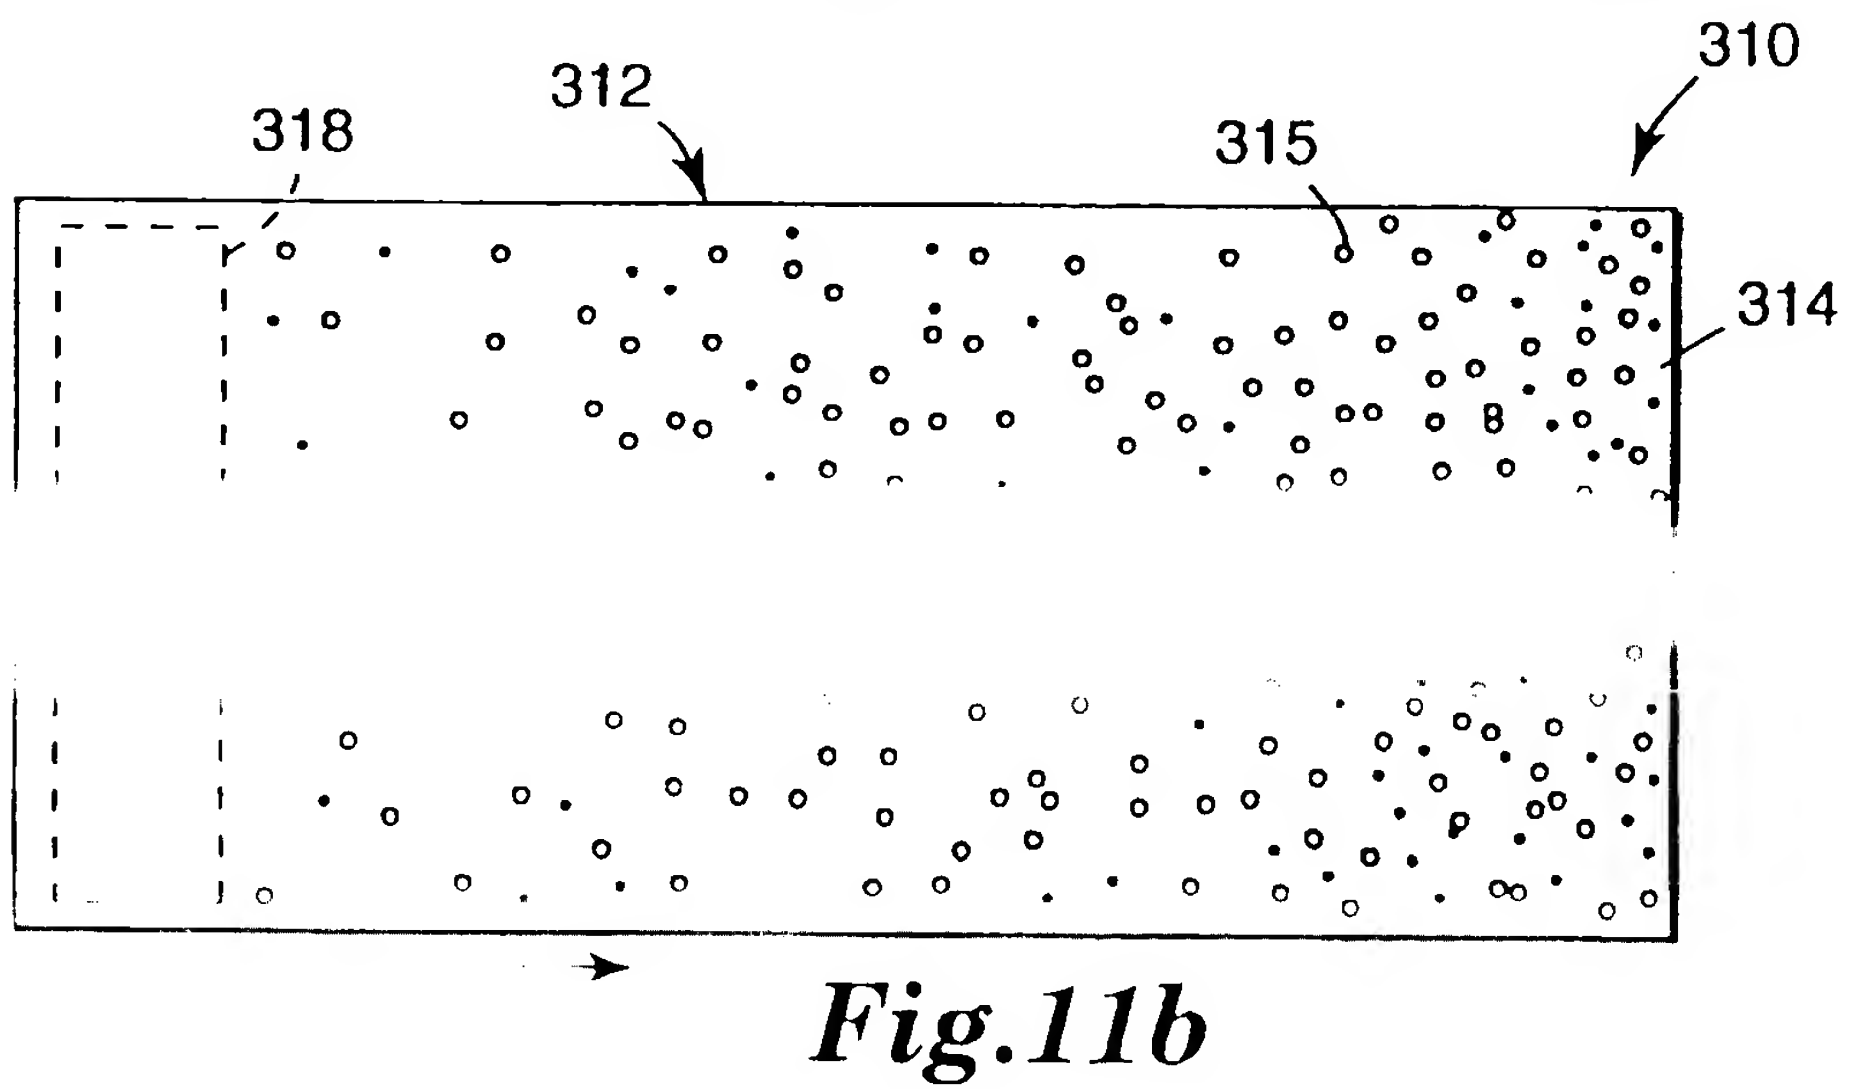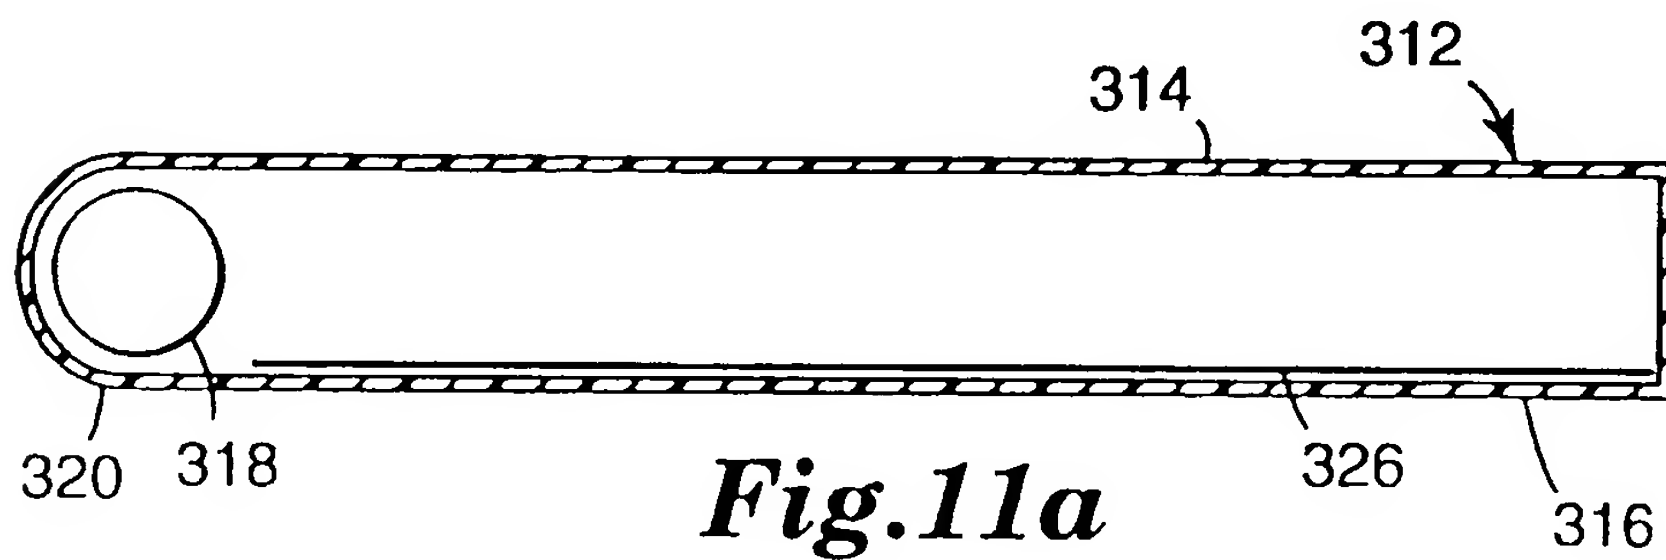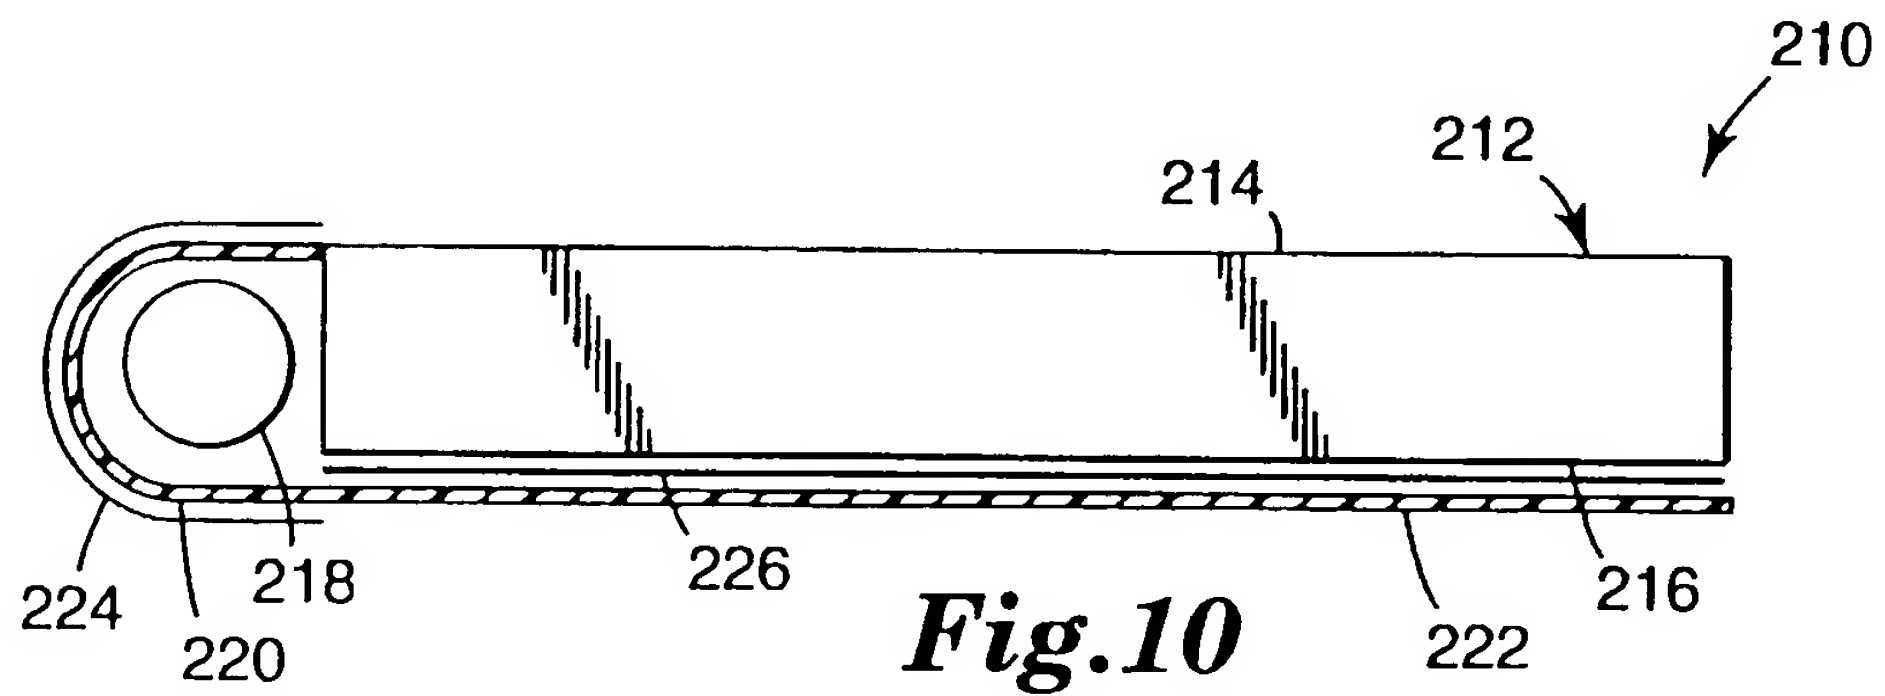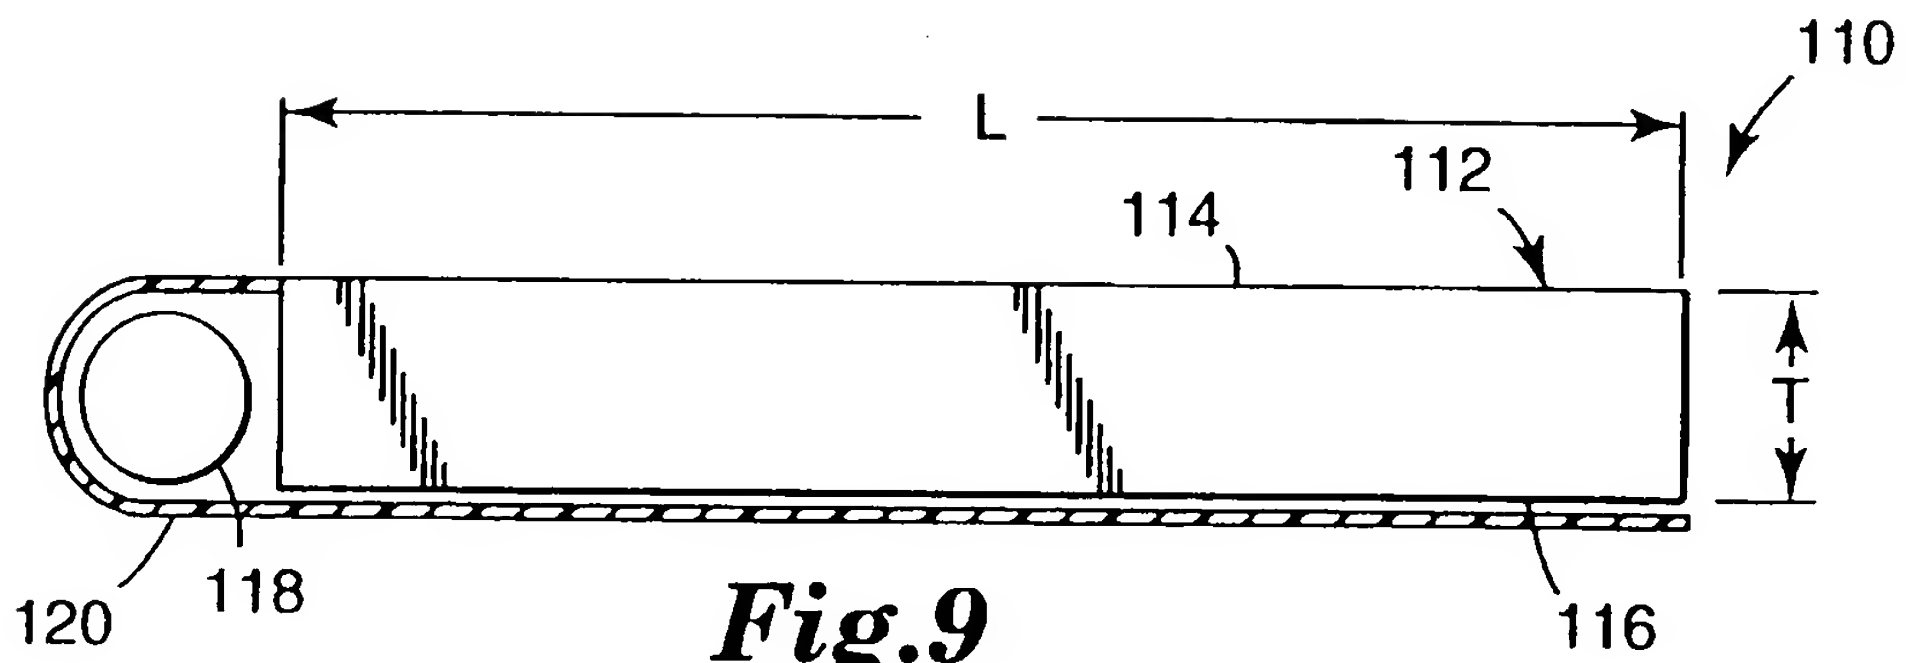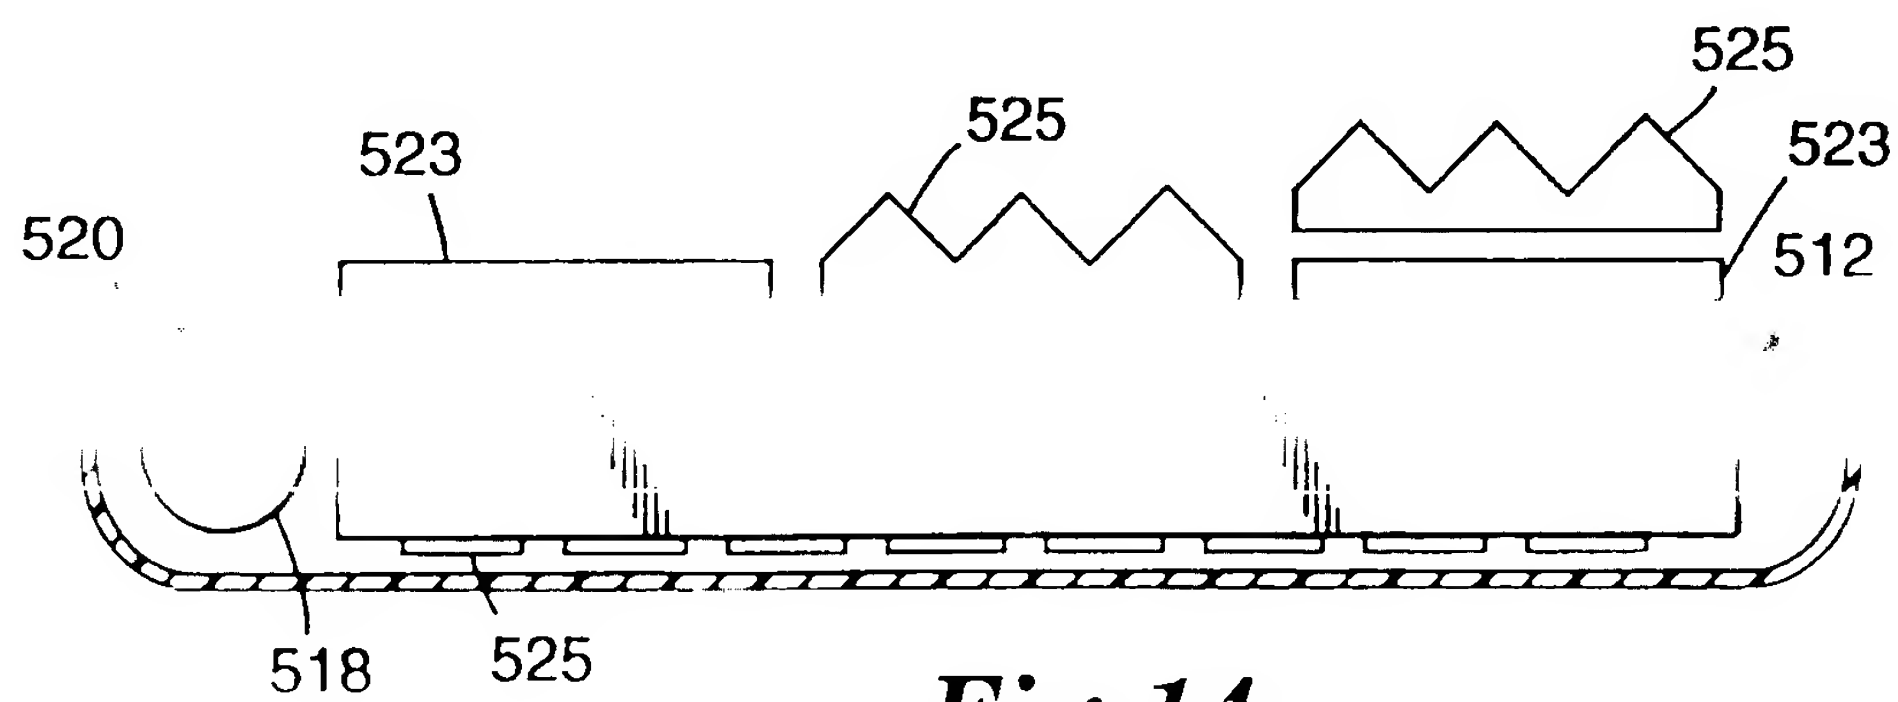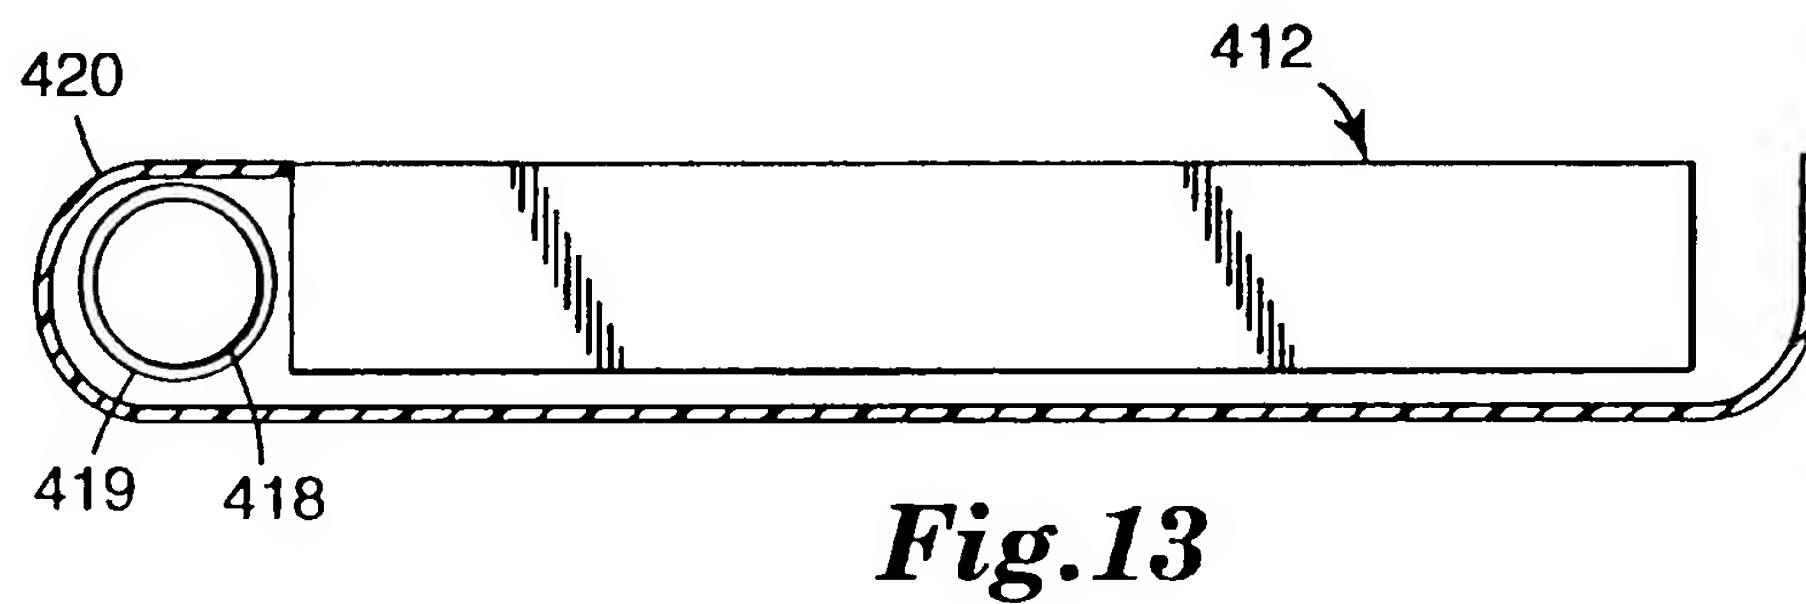

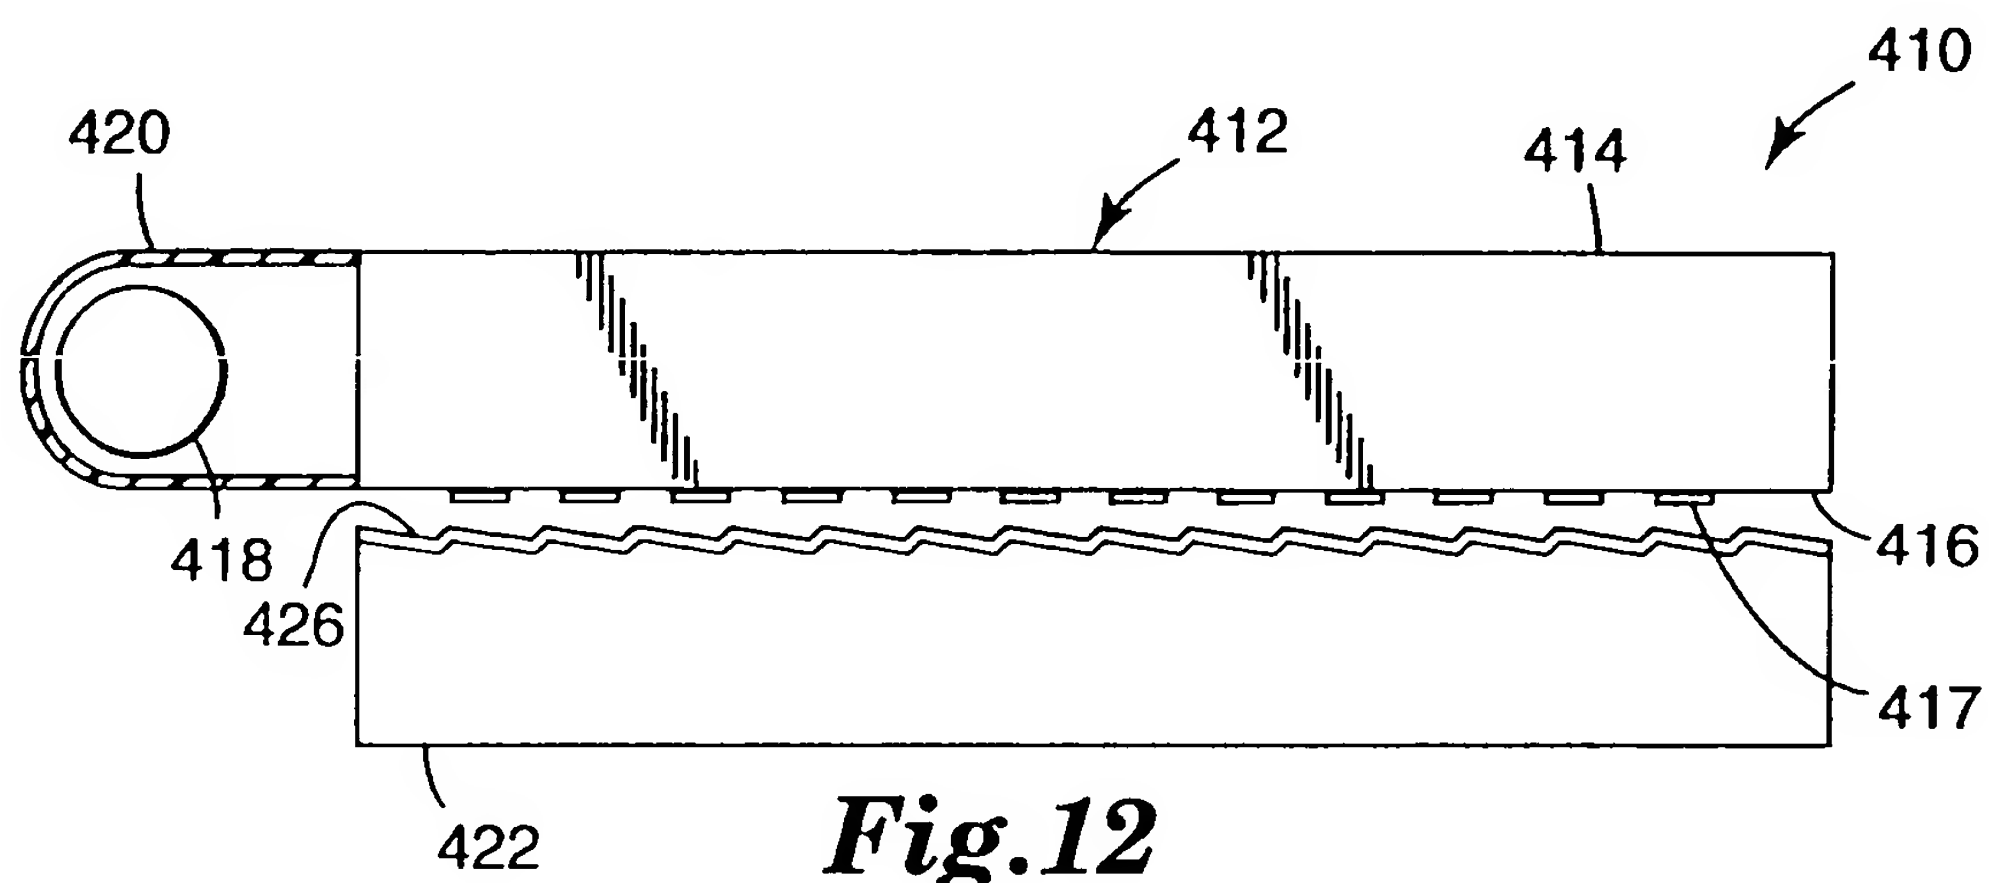

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/US 96/07596

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 F21V7/00 G02B5/30 B32B7/02 B32B27/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 B32B G02B F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO,A,96 19347 (MINNESOTA MINING AND MANUFACTURING COMPANY) 27 June 1996 see page 6, line 25-26; claims 1-31; figure 9 see page 9, line 28 - page 11, line 2 ---	1-3,10, 14-17, 24-47
P,X	WO,A,95 17692 (MINNESOTA MINING AND MANUFACTURING COMPANY) 29 June 1995 see page 30, line 8 - page 31, line 24 see page 1, line 29-33 - page 4, line 7-36; claims 8-12; figure 2; example --- -/--	1,10, 13-15, 24-44

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

document referring to a prior art document by means of a cross-reference

document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

document member of the same patent family

Date of the actual completion of the international search

23 July 1996

Date of mailing of the international search report

09.08.96

Name and mailing address of the ISA

European Patent Office, P.O. Box 5818 Patentuaan,
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Derz, I

INTERNATIONAL SEARCH REPORT

Inter. Appl. Application No
PCT/US 96/07596

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO,A,95 17303 (MINNESOTA MINING AND MANUFACTURING COMPANY) 29 June 1995 see page 11, line 10 - page 13, line 9; claims 1-44; figure 9 ---	1-3,10, 14-17, 24-47
P,X	WO,A,95 17691 (MINNESOTA MINING AND MANUFACTURING COMPANY) 29 June 1995 see page 12, line 20-31 - page 13, line 25-26; claim 16; figures 23-27 ---	1,24-44
Y	WO,A,94 10589 (THE DOW CHEMICAL COMPANY) 11 May 1994 see page 3, line 30-36 - page 8, line 16-23; claims 1,10,11,25; figure 1 see page 12, line 20 - page 13, line 23 ---	1
A	EP,A,0 490 279 (MINNESOTA MINING AND MANUFACTURING COMPANY) 17 June 1992 see column -1, line 2 - column 3, line 33-45; figures ---	1,10,15, 24
Y	EP,A,0 167 721 (MITSUBISHI RAYON CO.) 15 January 1986 see page 3, line 24 - page 15, line 14; claims 1,2,6-17,19-22; figures ---	1 10-14
A	EP,A,0 506 116 (NISSHA PRINTING CO.) 30 September 1992 see claims 1-6; figures 1,2 ---	1,10-14
A	EP,A,0 504 910 (TOSOH CORP.) 23 September 1992 see claims 1-5; figures 1,2,4 ---	1-9
Y	EP,A,0 500 089 (TOSOH CORP.) 26 August 1992 see claims 1-5; figures 1-4 -----	1 10,15

INTERNATIONAL SEARCH REPORT

information on patent family members

Inter. Application No

PCT/US 96/07596

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9619347	27-06-96	NONE	
WO-A-9517692	29-06-95	AU-B- 1443595	10-07-95
WO-A-9517303	29-06-95	AU-B- 1866395	10-07-95
WO-A-9517691	29-06-95	NONE	
WO-A-9410589	11-05-94	AU-B- 5322594	24-05-94
		CN-A- 1088511	29-06-94
		EP-A- 0666993	16-08-95
		JP-T- 8503312	09-04-96
		US-A- 5448404	05-09-95
EP-A-490279	17-06-92	DE-A- 4039291	11-06-92
		CA-A- 2057154	09-06-92
		US-A- 5224770	06-07-93
EP-A-167721	15-01-86	JP-A- 61015104	23-01-86
		JP-A- 61105504	23-05-86
		US-A- 4642736	10-02-87
EP-A-506116	30-09-92	JP-A- 4369619	22-12-92
		DE-D- 69207934	14-03-96
		JP-A- 5119317	18-05-93
		US-A- 5363294	08-11-94
EP-A-504910	23-09-92	JP-A- 4356015	09-12-92
		US-A- 5289351	22-02-94
EP-A-500089	26-08-92	JP-A- 4280225	06-10-92
		JP-A- 4267222	22-09-92
		US-A- 5262928	16-11-93